





201743

VL-TZSA-TZKA-3JBK-100X-S

Connection cable: Connector / coupling

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type
- Gold-plated plug-in contacts

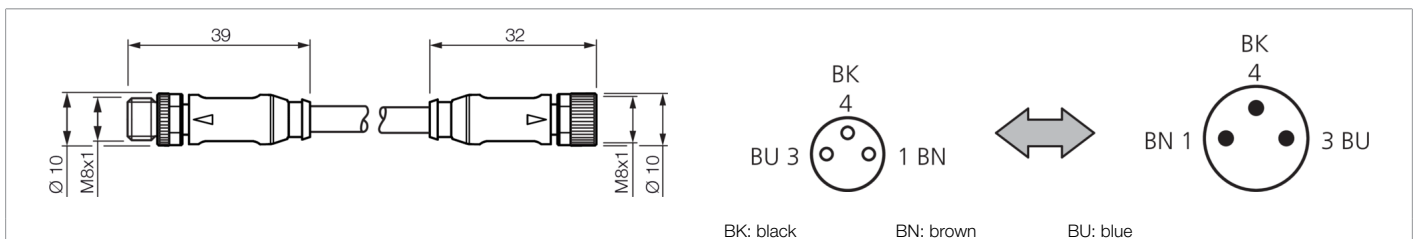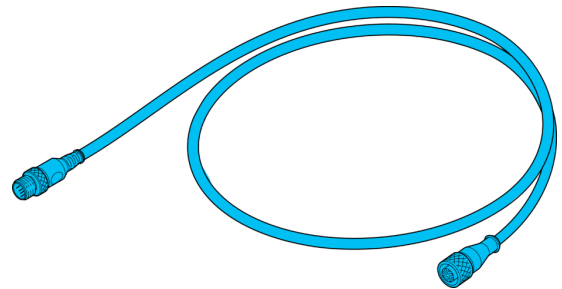

Function											

Technical data (typ.)	+20°C
Service voltage	< 60 V AC/DC
Length	1,000 mm
Diameter	Ø 4.3 mm (Diameter)
Thread	M8 x 1
Material of cable	Polyurethane
Material	Polyurethane (Connector)
Drag chain properties	<ul style="list-style-type: none"> <li>■ &lt; 2 Mio. (Bending cycles)</li> <li>■ 3.3 m/s (Max. moving speed)</li> <li>■ 5 m/s<sup>2</sup> (Max. acceleration)</li> </ul>
Protection class	III, operation on protective low voltage
Component	Cable connection
Design	Straight / straight
Characteristics	Metal nut
Drag chain compatible	Yes
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.4 Nm)
Connection	Connector, M8, 3-pin, A-coded
Connection 2	Socket, M8, 3-pin, A-coded
Cross-section	0.25 x 0.25 mm (3 x)

More information / accessories	<a href="https://www.di-soric.com/201743">https://www.di-soric.com/201743</a>
--------------------------------	---