# 201745
# TSHM-Z-2.0/TKM-Z
# Connection cable: Connector / coupling

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type
- Gold-plated plug-in contacts

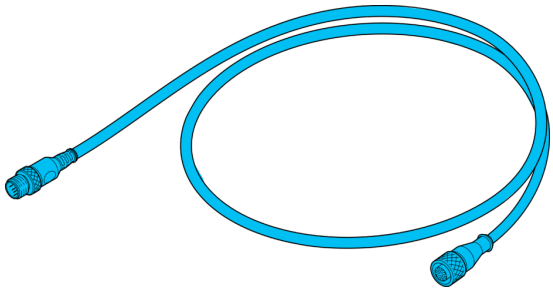

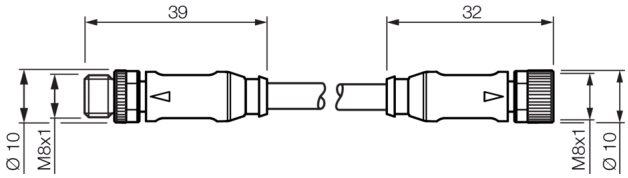


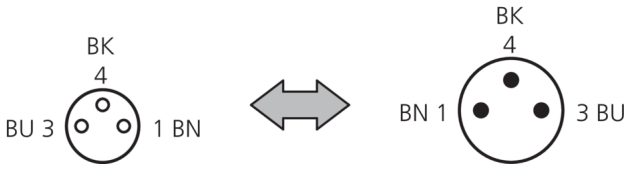


BK: black BN: brown BU: blue

| Function |
|---|

| Technical data (typ.) | +20°C |
|---|---|
| Service voltage | < 60 V AC/DC |
| Length | 2,000 mm |
| Diameter | Ø 4.3 mm (Diameter) |
| Thread | M8 x 1 |
| Material of cable | Polyurethane |
| Material | Polyurethane (Connector) |
| Drag chain properties | ■ < 2 Mio. (Bending cycles)<br>■ 3.3 m/s (Max. moving speed)<br>■ 5 m/s² (Max. acceleration) |
| Protection class | III, operation on protective low voltage |
| Component | Cable connection |
| Design | Straight / straight |
| Characteristics | Metal nut |
| Drag chain compatible | Yes |
| Ambient temperature during operation | -5 … +80 °C (Movable, Fixed) |
| Protection type | IP 67 (at tightening torque 0.4 Nm) |
| Connection | Connector, M8, 3-pin, A-coded |
| Connection 2 | Socket, M8, 3-pin, A-coded |
| Cross-section | 0.25 x 0.25 mm (3 x) |

| More information / accessories | https://www.di-soric.com/201745 |
|---|---|


© di-soric . Right to change reserved