




**201870**  
**VKHM-Z-2.5**  
**Connection cable**

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type

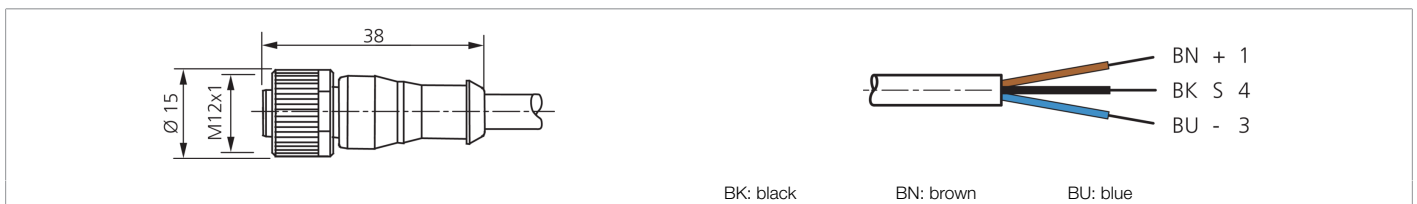

Function											
											  

Technical data (typ.)	+20°C
Service voltage	< 250 V AC/DC
Length	2,500 mm
Diameter	Ø 4.3 mm (Diameter)
Thread	M12 x 1
Material of cable	Polyurethane
Material	Polyurethane (Connector)
Drag chain properties	<ul style="list-style-type: none"> <li>■ &lt; 2 Mio. (Bending cycles)</li> <li>■ 3.3 m/s (Max. moving speed)</li> <li>■ 5 m/s<sup>2</sup> (Max. acceleration)</li> </ul>
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Straight / open cable end
Characteristics	A-coded, Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Socket, M12, 3-pin
Connection 2	0.34 mm <sup>2</sup> (3 x)

More information / accessories	<a href="https://www.di-soric.com/201870">https://www.di-soric.com/201870</a>
--------------------------------	---