





202023

WRB 130 P-5.6-2.5

Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

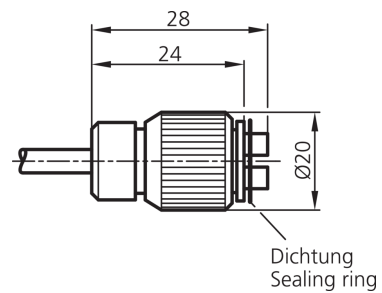

#### Technical data (typ.)

Length	1,000 mm
Dimension fiber bundle	Ø 2.5 mm
Housing length	13 mm
Light aperture	axial
Mounting diameter	Ø 5.6 mm
Bending radius	> 5 x tube-Ø
Material of fiber	Glass fibers
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ PU sleeve (Coating)</li> </ul>
Operating principle	Diffuse sensor
Design	Cylinder
Single fiber	Ø 0.05 mm
To be used for	Amplifiers for glass fiber optics
Opening angle	67°
Scanning range	85 mm
Temperature resistance	-20 ... +90 °C (temporarily up to +120 °C)
Protection type	IP 67

#### +20°C, 24 V DC

#### More information / accessories

<https://www.di-soric.com/202023>