




202153
WRBT 2000 KBF-M6-1.0
Plastic fiber optics

- Small bending radius
- Flexible probe made of stainless steel

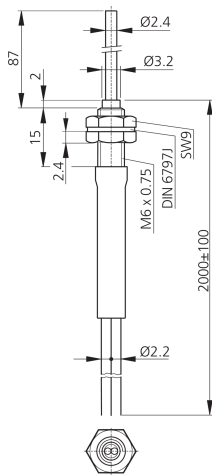

Technical data (typ.)		+20°C	
Length		2,000 mm	
Thread		M6 x 0.75	
Light aperture		axial, Flexible sensor probe	
Bending radius		> 2.5 mm	
Bending radius of probe		> 25 mm	
Material of fiber		PMMA	
Material		<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ VA (Thread sleeve) ■ PE (Coating) 	
Operating principle		Diffuse sensor	
Design		Thread	
Single fiber-optics		Ø 2.2 mm	
Single fiber		Ø 1.0 mm (151 x 0.075 mm)	
To be used for		Device series OLV-K Amplifier	
Opening angle		56°	
Range		150 mm	
Temperature resistance		-55 ... +70 °C	
More information / accessories		https://www.di-soric.com/202153	