





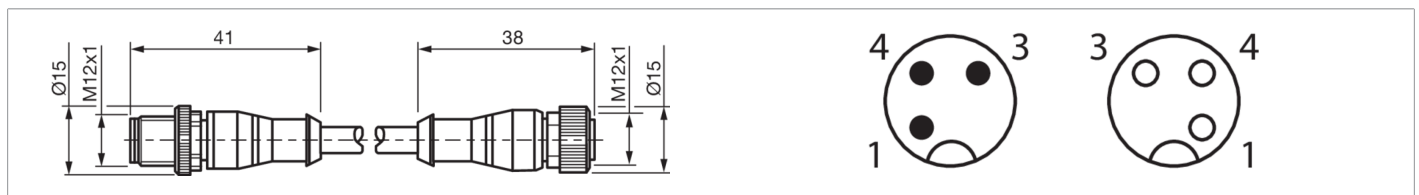

202501
VSHM-Z-0.6/VKM-Z
Connection cable

- Connection cable: Connector / coupling
- Sturdy metal union nut
- Flexible lead design
- High protection type

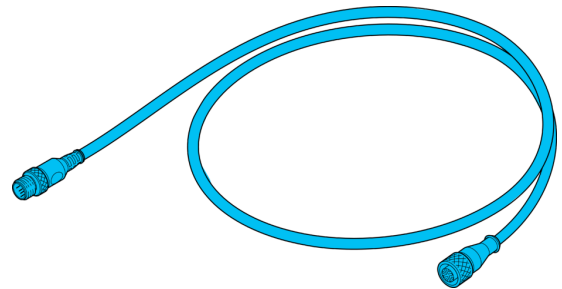

Function										
										 

Technical data (typ.)		+20°C, 24 V DC	
Service voltage		< 250 V AC/DC	
Length		600 mm	
Material of cable		Polyurethane	
Drag chain properties		10 Mio. (Bending cycles)	
Protection class		III, operation on protective low voltage	
Component		Connection cable	
Design		Straight / straight	
To be used for		Device plug M12, 3-pin	
Drag chain compatible		Yes	
Ambient temperature during operation		-25 ... +80 °C (Movable, Fixed)	
Protection type		IP 67 (at tightening torque 0.6 Nm)	
Connection		Connector, M12, 3-pin, A-coded	
Connection 2		Socket, M12, 3-pin, A-coded	
Cross-section		0.34 x 0.34 mm (3 x)	
More information / accessories		https://www.di-soric.com/202501	