




202853
TKHM-Z/TSM-Z/I
Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

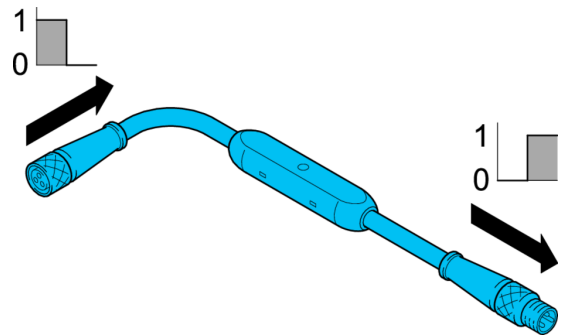

1) LED SWITCHING OUTPUT 2) LED STATUS

BK: black BN: brown BU: blue

4 BK
BU 3 1 BN

Kupplung
Coupling
M8

4 BK
BN 1 3 BU

Stecker
Connector
M8

Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 35 V DC
No-load current (max.)	20 mA
Thread	M8 x 1
Housing material	Plastic
Protection class	III, operation on protective low voltage
Evaluation	npn inverter
Application	Digital signal
Function selection	npn
Switching output	npn
Switching frequency	3500 Hz
Ambient temperature during operation	-20 ... +70 °C
Protection type	IP 67
Connection	Pigtail, Coupling, M8, 3-pin
Connection 2	Pigtail, Connector, M8, 3-pin

More information / accessories <https://www.di-soric.com/202853>