




203757

OSP 50 M 20000-IBS

High performance light barrier, transmitter

- High function reserve
- Extremely dirt-resistant
- Long range
- Transmitter reflected beam angle switchable
- Transmit power adjustable
- Infrared light

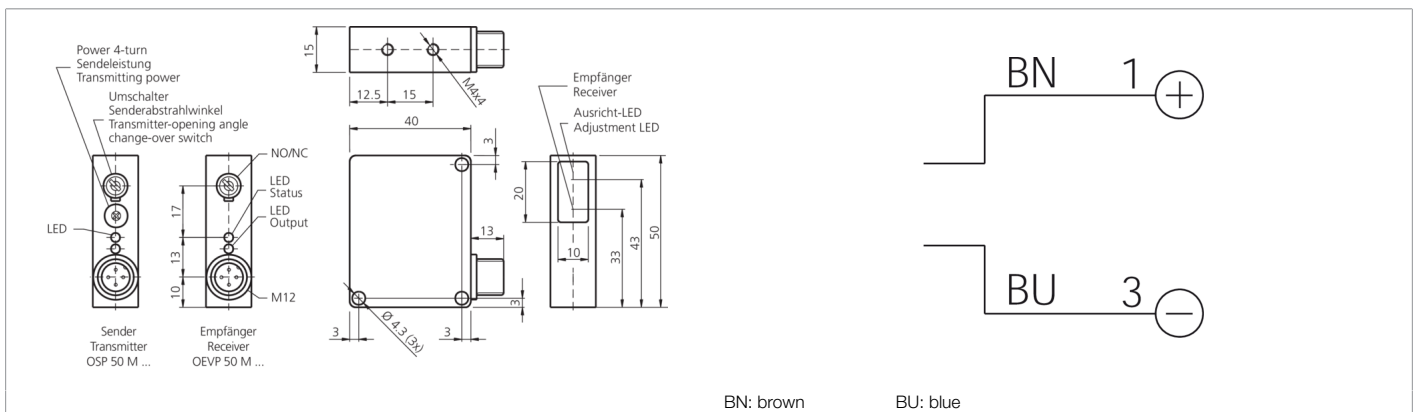

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	22 mA
Housing dimensions	50 x 40 x 15 mm
Housing length	40 mm
Housing height	50 mm
Housing width	15 mm
Housing material	Die-cast zinc (Black, painted)
Protection class	III, operation on protective low voltage
Operating principle	Through-beam sensor, transmitter
Evaluation	digital
Design	Cuboid design
Characteristics	High transmit power and dirt penetration
Consisting of	Transmitter
Light source	LED
Color	Infrared
Wavelength	870 nm
Modulation	Clocked
Opening angle	6°/15° switchable
Ambient light immunity	15 kLx Sunlight, 2 kLx Clocked light
Range	0 ... 20000 mm (dependent on the receiver)
Sensitivity adjustment	Potentiometer (4-turn)
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 3-pin



**203757**

**OSP 50 M 20000-IBS**

**High performance light barrier, transmitter**

[More information / accessories](#)

<https://www.di-soric.com/203757>