



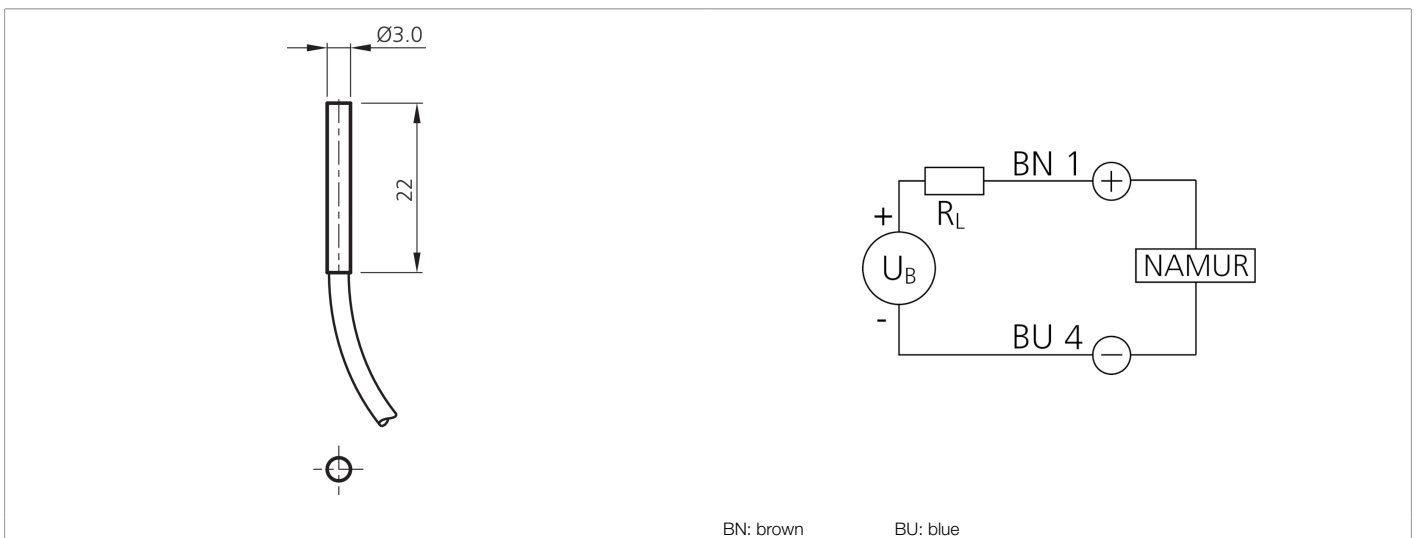

204083
DCC 3.0 V 0.6 NAMUR
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED



Function												
												 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	7.7 ... 9 V DC
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	Flush
Diameter	Ø 3.0 mm (Diameter)
Housing length	22 mm
Housing material	Stainless steel
Material of cable	PVC
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Cylinder
Product series	Namur
Switching output	Namur, < 1 mA
Voltage drop (max.)	2 V
Switching distance (SN)	0.6 mm
Switching frequency	10000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Cable, 2.0 m, 2-pin, A-coded



204083
DCC 3.0 V 0.6 NAMUR
Inductive proximity sensor

[More information / accessories](#)

<https://www.di-soric.com/204083>