
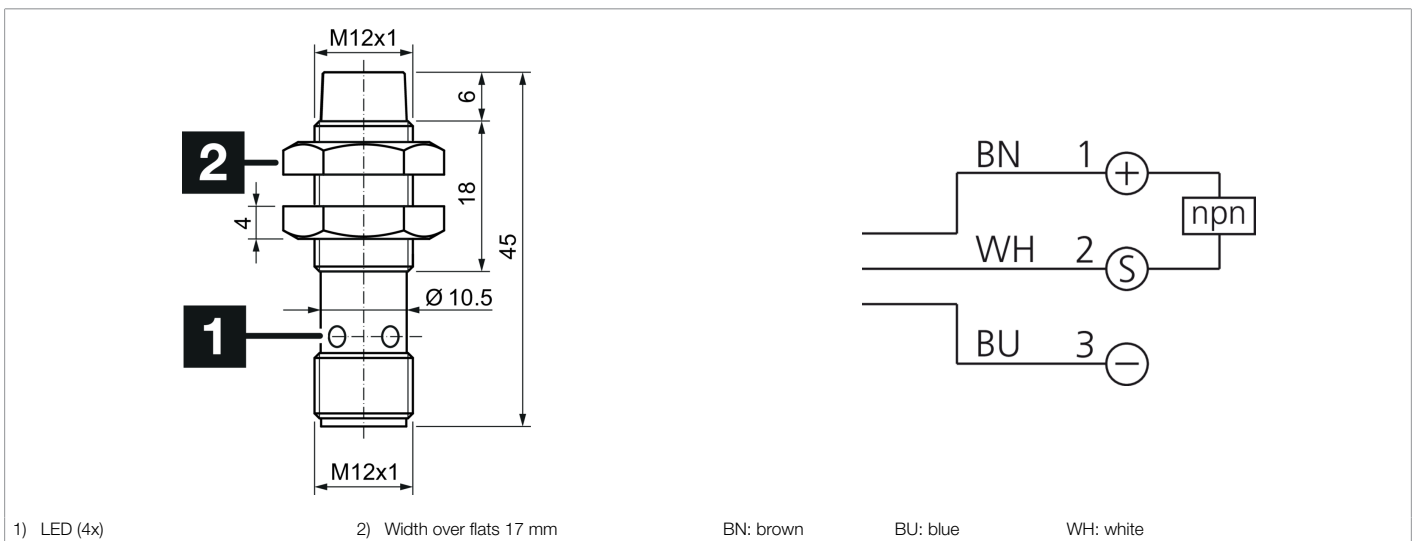


206645
DCCK 12 M 04 NOK-IBSL
Inductive proximity sensor

- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

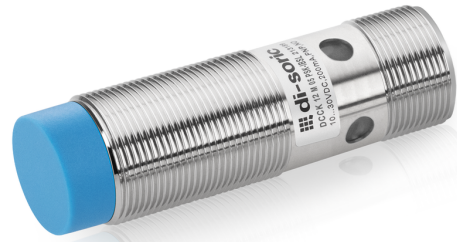

| Function | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------------|------------------------------------------|
| Service voltage | 10 ... 30 V DC |
| Internal power consumption | < 10 mA |
| Insulation voltage endurance | 500 V |
| Installation type | non-flush |
| Thread | M12 x 1 |
| Housing length | 45 mm |
| Housing material | Brass (nickel-plated) |
| Protection class | III, operation on protective low voltage |
| Operating principle | inductive |
| Evaluation | digital |
| Design | Thread |
| Product series | INS-100 Standard |
| Switching output | npn, 200 mA, NC |
| Voltage drop (max.) | 2.4 V |
| Switching distance (SN) | 4 mm |
| Standardized measuring plate | 12 x 12 x 1 mm |
| Switching hysteresis (max.) | < 15 % |
| Switching frequency | 800 Hz |
| Ambient temperature during operation | -25 ... +70 °C |
| Protection type | IP 67 |



206645

DCCK 12 M 04 NOK-IBSL

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Connection

Connector, M12, 4-pin, A-coded

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/206645>