




206883
BE 1-A240-G0-K-BS
Barlight

- Very compact design
- Homogeneous luminous field
- Cable outlet usable at the front or back side
- Universal mounting options
- Metal casing
- High efficiency
- Robust metal housing

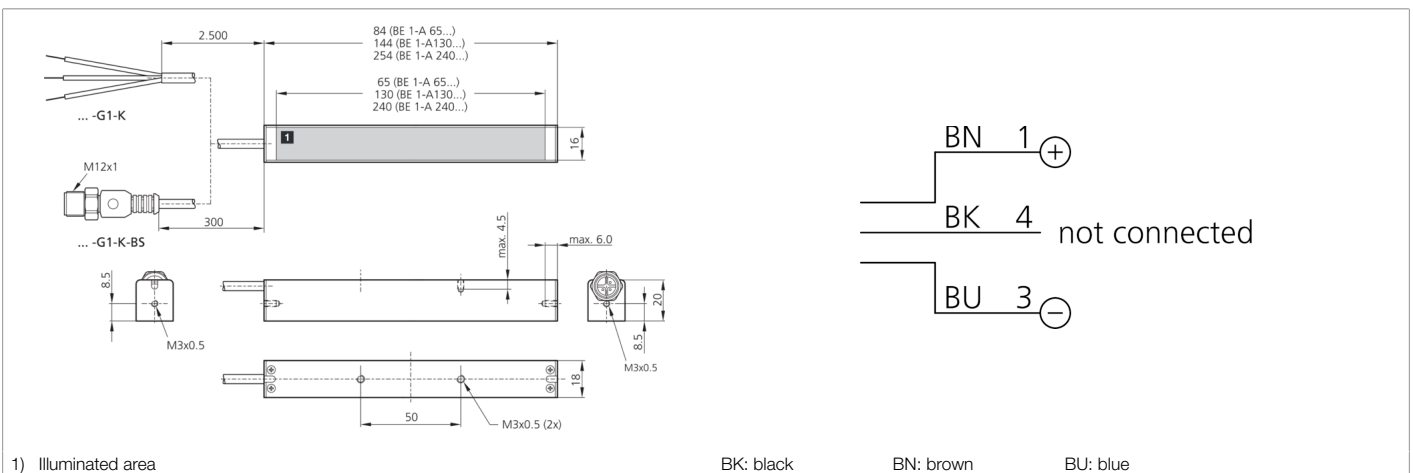

Function									

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	330 mA (24 V DC)
Power	8.0 W (24 V DC)
Inverse polarity protection	Yes
Illuminated area	240 x 16 mm
Housing dimensions	16 x 20 x 254 mm
Housing material	Aluminum (Black, Anodized)
Material	Polyurethane (Cable)
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Approvals	UL
Design	Barlight
Light source	LED
Color	Infrared
Wavelength	870 nm
Deflection angle FWHM	34°
Light intensity	<ul style="list-style-type: none"> ■ 6500 µW/cm² (100.0 mm) ■ 3200 µW/cm² (200.0 mm) ■ 1000 µW/cm² (500.0 mm)
Control	without power control
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 20
Connection	Pigtail, 0.3 m, M12, 3-pin

**206883****BE 1-A240-G0-K-BS****Barlight****Technical data (typ.)****+20°C, 24 V DC**

Connection cable

VK ...

More information / accessories<https://www.di-soric.com/206883>