



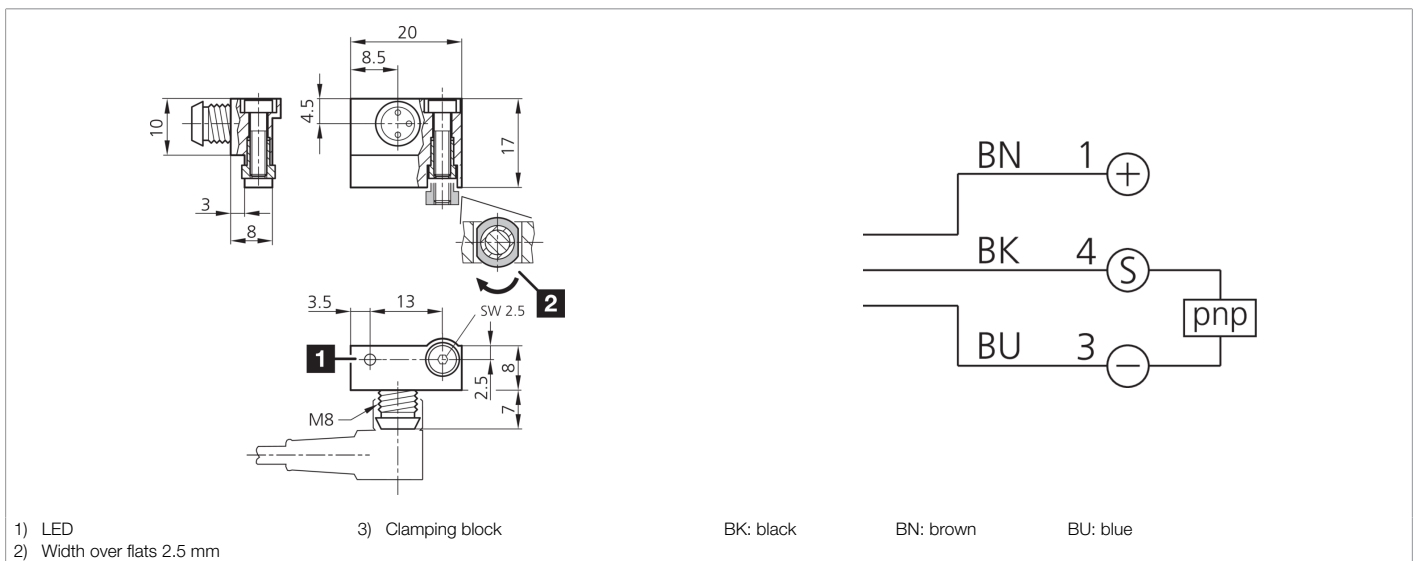

207750
MZERTI 20 PSK-TSSL
Cylinder sensor

- For pneumatic cylinders with T-shaped groove to be inserted from above
- Compact metal housing with metal connector M8
- Fully electronic
- High reproducibility
- High protection type



Function										

Technical data (typ.)	+20°C, 24 V DC
Current-carrying capacity	200 mA, short-circuit-proof
Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Insulation voltage endurance	500 V
Cylinder groove	T-groove, Can be inserted into the groove from above
Mounting	Locknut
Housing material	Die-cast zinc
Protection class	III, operation on protective low voltage
Characteristics	Allen screw SW 2.5 mm
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Reproducibility	0.1 mm
Display	LED yellow - Output signal
Switching frequency	1000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...

More information / accessories	https://www.di-soric.com/207750
--------------------------------	---



207750
MZERTI 20 PSK-TSSL
Cylinder sensor