




**208227**  
**VKHM-Z-5/4-A**  
**Connection cable**

- Sturdy metal union nut
- Flexible lead design
- Durable PU coating
- Good stripping properties
- Chemically stable

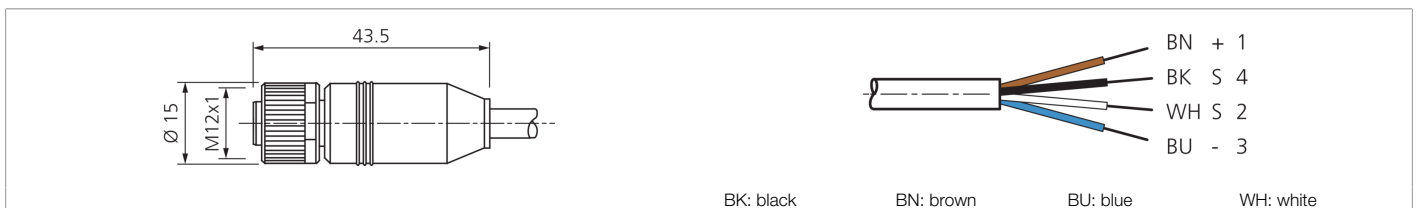

Function														
													CE	

Technical data (typ.)	
Service voltage	60 V AC/DC (with max. 4.0 A)
Length	5,000 mm
Thread	M12
Material of cable	Polyurethane
Drag chain properties	10 x Ø (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
Drag chain compatible	Yes
LED Anzeige	No
Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67
Connection	Socket, M12, 4-pin, A-coded
Cross-section	0.34 mm <sup>2</sup> (4 x)
More information / accessories	
	<a href="https://www.di-soric.com/208227">https://www.di-soric.com/208227</a>