





209318

DCBK 08 MB 02 NS-T3

Inductive proximity sensor

- Short design
- Metal connector
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- 4 LEDs for switching status display

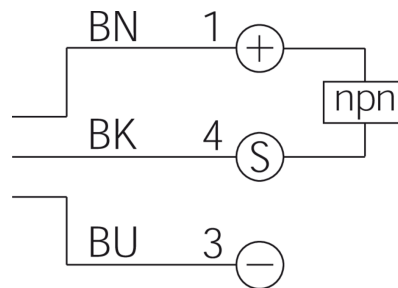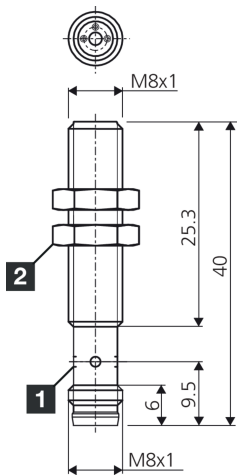

1) LED

2) Width over flats 13 mm

BK: black

BN: brown

BU: blue

#### Function

										CE	
--	--	--	--	--	--	--	--	--	--	----	--

#### Technical data (typ.)

**+20°C, 24 V DC**

Service voltage	10 ... 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M8 x 1
Housing length	40 mm
Housing material	Brass (nickel-plated)
Material	PBT (Sensor probe)
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	increased operating distance
Product series	IND-100 Short design
Switching output	npn, 200 mA, NO
Voltage drop (max.)	1.8 V (200 mA)
Switching distance (SN)	2 mm
Standardized measuring plate	8 x 8 x 1 mm
Switching hysteresis (max.)	1 ... 20 %
LED Anzeige	Yes



209318

DCBK 08 MB 02 NS-T3

Inductive proximity sensor

**Technical data (typ.)**

**+20°C, 24 V DC**

Switching frequency

5000 Hz

Ambient temperature during operation

-25 ... +70 °C

Protection type

IP 67

Connection

Connector, M8, 3-pin, A-coded

Connection cable

TK ...

**More information / accessories**

<https://www.di-soric.com/209318>