



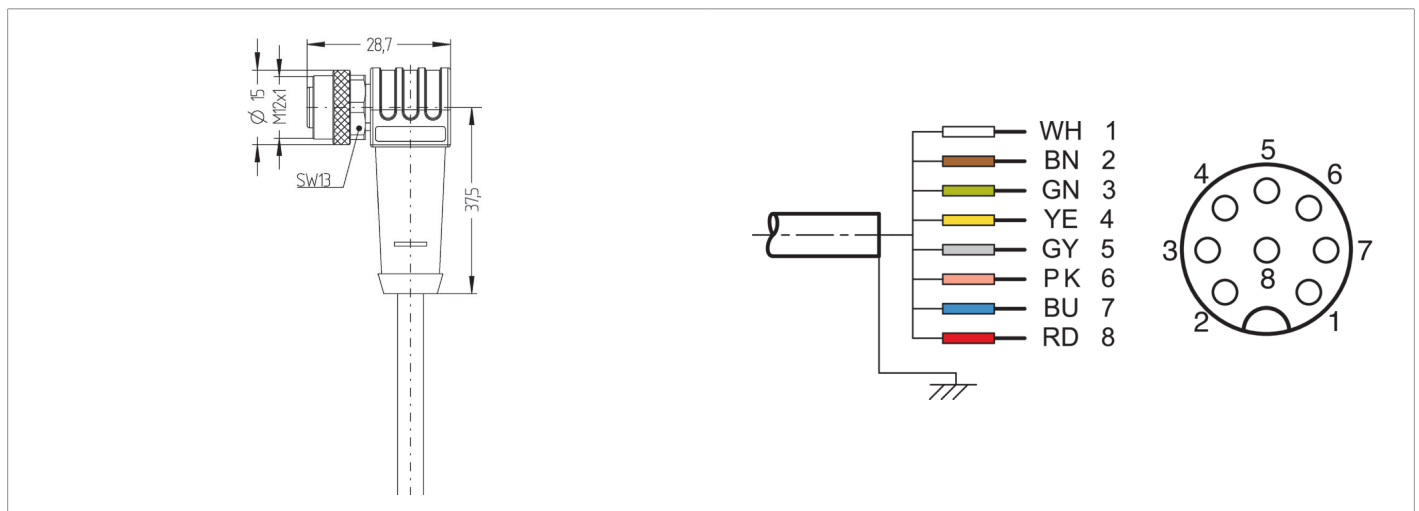

**209718**  
**VKPM-W-5/8-A**  
**Connection cable**

- Shielded
- Drag chain compatible
- Sturdy metal union nut
- High protection type
- Gold-plated plug-in contacts
- RoHs-compliant



Function													
												CE	

Technical data (typ.)	+20°C
Service voltage	< 60 V AC/DC
Length	5,000 mm
Diameter	Ø 6.7 mm (Diameter)
Thread	M12 x 1
Material of cable	PVC
Material	TPU (Connector)
Protection class	III, operation on protective low voltage
Design	Angled / open cable end
Characteristics	RoHs-compliant, Metal nut
Drag chain compatible	Yes
Ambient temperature during operation	0 ... +80 °C (Movable, Fixed)
Protection type	IP 68
Connection	Socket, M12, 8-pin
Connection 2	0.25 mm <sup>2</sup> (8 x)

More information / accessories	<a href="https://www.di-soric.com/209718">https://www.di-soric.com/209718</a>
--------------------------------	---