




**211049**  
**OGLL 081 G3-T3**  
**Laser angled light barrier**

- IO-Link
- 4 operating modes as an IO-Link parameter
- Switch-on/off delay as an IO-Link parameter
- Diagnostics with IO-Link
- Metal casing
- Electronics integrated
- Sensitivity is adjustable
- High switching frequency
- Light/dark switching
- Bright ring LED

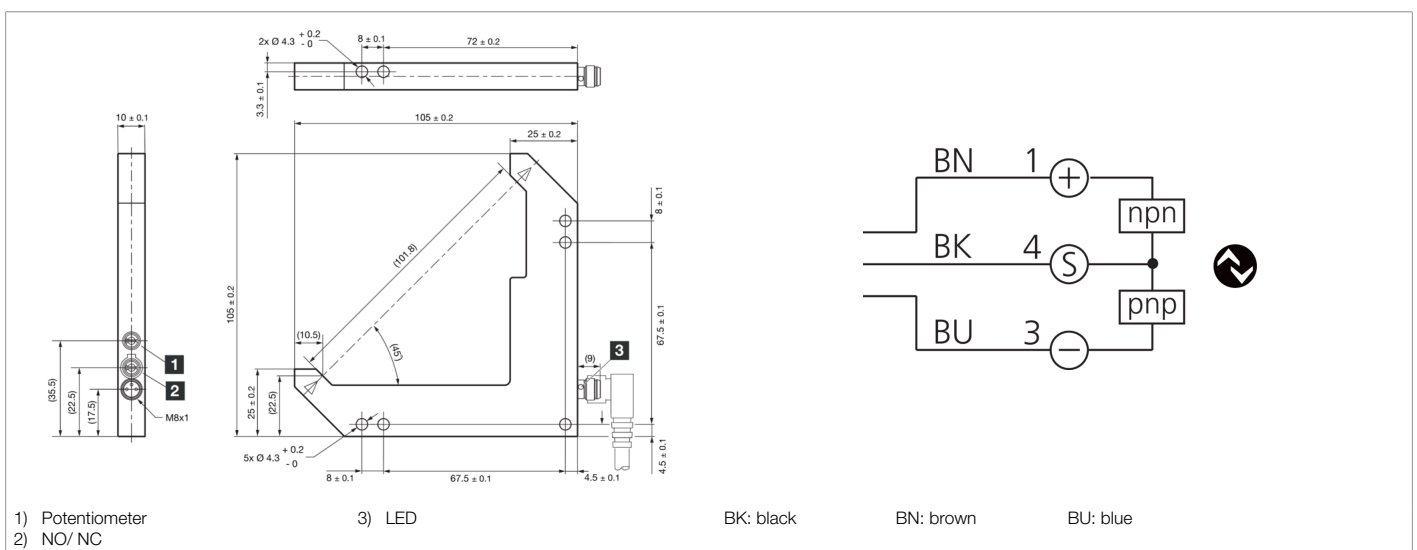

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Leg length internal	80/80 mm
Housing dimensions	105 x 105 x 10 mm
Housing length	105 mm
Housing height	105 mm
Housing width	10 mm
Housing material	Die-cast zinc (Black, powder-coated)
Weight	136 g
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	digital
Design	Angle
Switching output	Push-pull, 100 mA, NO/NC, switchable
Voltage drop (max.)	1 V
Interface	IO-Link (V1.1, COM2 (38.4 kBd) Smart Sensor Profile)
Light source	Laser
Laser class	CLASS 1 LASER PRODUCT, 1 (IEC 60825-1:2014 / EN 60825-1:2014)



**211049**  
**OGLL 081 G3-T3**  
**Laser angled light barrier**

Technical data (typ.)	+20°C, 24 V DC
Color	Red (Pp < 1,6 mW t = 11,4 µs)
Wavelength	655 nm (Pp < 0.3 mW t = 3.4 µs)
Modulation	Clocked
Range	100 mm (optical axis)
Resolution (factory setting)	0.05 mm (STANDARD)
Reproducibility (factory setting)	0.01 mm (STANDARD)
Resolution (STANDARD)	0.05 mm
Reproducibility (STANDARD)	0.01 mm
Resolution (HIGH RESOLUTION)	0.03 mm
Reproducibility (HIGH RESOLUTION)	0.01 mm
Resolution (POWER)	0.15 mm
Reproducibility (POWER)	0.015 mm
Resolution (SPEED)	0.05 mm
Reproducibility (SPEED)	0.015 mm
Sensitivity adjustment	Potentiometer or IO-Link
Switching frequency (factory setting)	5000 Hz (STANDARD)
Switching frequency (STANDARD)	5000 Hz
Switching frequency (HIGH RESOLUTION)	2000 Hz
Switching frequency (POWER)	1000 Hz
Switching frequency (SPEED)	10000 Hz
Ambient temperature during operation	-25 ... +60 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/211049">https://www.di-soric.com/211049</a></b>