




**212983**  
**OT21-PS-0.3T3**  
**Retroreflective diffuse sensor**

- Miniature design
- Mounting element made of metal
- High switching frequency
- IO-Link
- Diagnostic function reserve

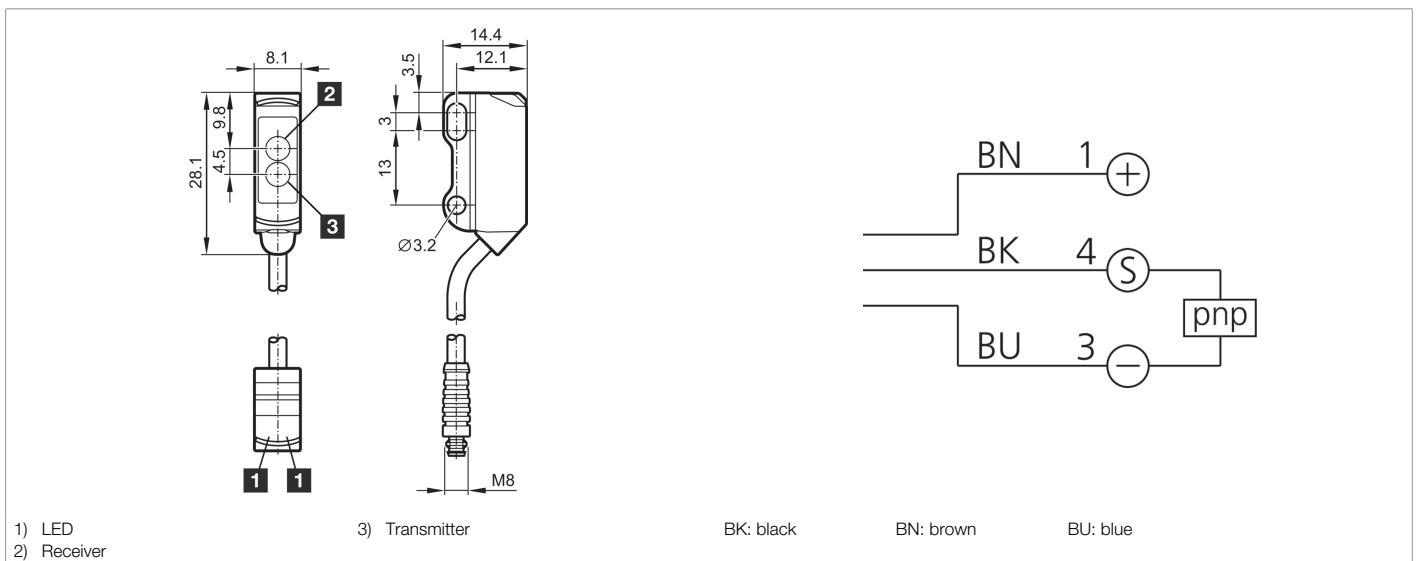

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	20 mA
Inverse polarity protection	Yes
Short-circuit protection	Yes
Insulation voltage endurance	500 V
Housing dimensions	28.1 x 8.1 x 14.4 mm
Housing length	8.1 mm
Housing height	28.1 mm
Housing width	14.4 mm
Housing material	Stainless steel / Plastic
Material of cable	PVC
Material	Plastic (Window / optics)
Weight	21 g
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Cuboid design
Switching output	pnp, 100 mA, NO/NC, configurable
Voltage drop (max.)	2.5 V



**212983**

**OT21-PS-0.3T3**

**Retroreflective diffuse sensor**

<b>Technical data (typ.)</b>		<b>+20°C, 24 V DC</b>
Interface		IO-Link (V1.1, COM2 38.4 kBd, Smart Sensor Profile)
Light source		LED
Color		Red
Wavelength		633 nm
Modulation		Clocked
Light spot size		Ø 18 mm (at distance of 180 mm)
Scanning range		0 ... 180 mm (configurable)
Standardized measuring plate		200 x 200 mm (white)
Sensitivity adjustment		IO-Link
Display		LED Green - Status, yellow - Switching output
Switching frequency		1000 Hz
Ambient temperature during operation		-25 ... +60 °C
Protection type		IP 65 / IP 67
Connection		Pigtail, 0.3 m, M8, 3-pin
Connection cable		TK ...
<b>More information / accessories</b>		<b><a href="https://www.di-soric.com/212983">https://www.di-soric.com/212983</a></b>