




**212988**  
**OR21-NS-0.3T3**  
**Retroreflective sensor**

- Miniature design
- Mounting element made of metal
- High switching frequency
- Long range

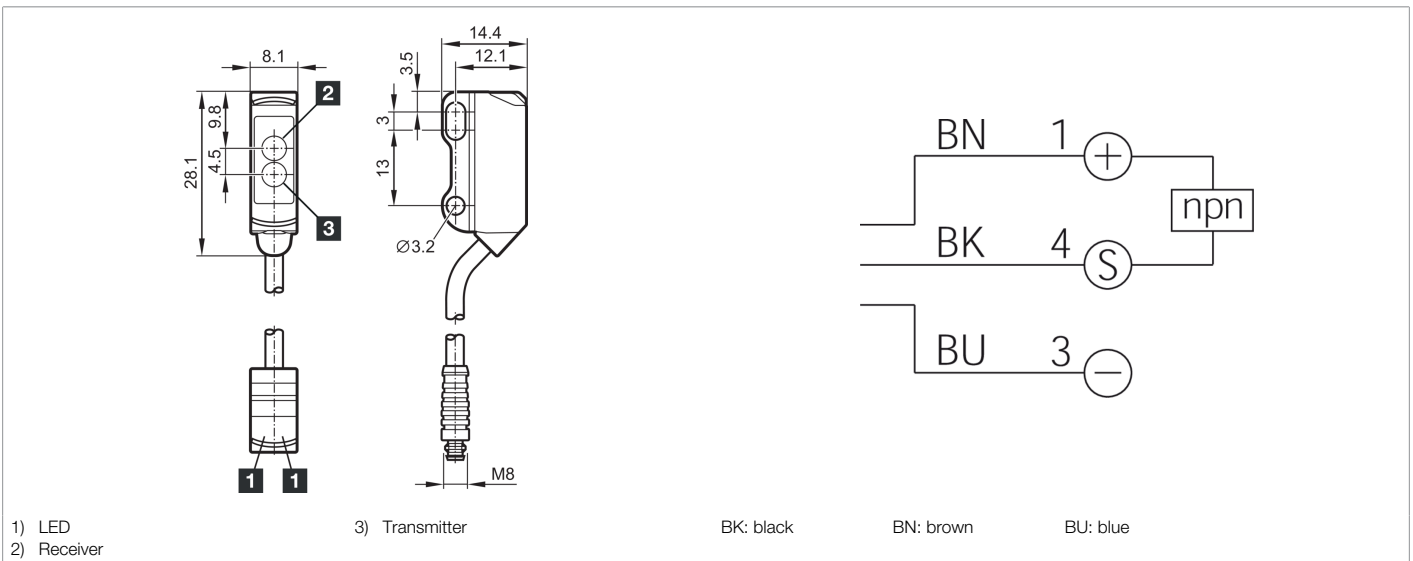

Function									

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	20 mA
Inverse polarity protection	Yes
Housing dimensions	28.1 x 8.1 x 14.4 mm
Housing length	8.1 mm
Housing height	28.1 mm
Housing width	14.4 mm
Housing material	Stainless steel / Plastic
Material of cable	PVC
Material	Plastic (Window / optics)
Weight	21 g
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Retroreflective sensor
Evaluation	digital
Design	Cuboid design
Switching output	npn, 100 mA, NO
Voltage drop (max.)	2.5 V
Light source	LED
Color	Red



**212988**  
**OR21-NS-0.3T3**  
**Retroreflective sensor**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Wavelength	633 nm
Modulation	Clocked
Light spot size	Ø 120 mm (at distance of 1800 mm)
Range	20 ... 1800 mm
Standardized measuring plate	200 x 200 mm (white)
Referring reflector	R 19 x 54 mm
Sensitivity adjustment	no setting elements
Display	LED Green - Operation, yellow - Switching output
Switching frequency	1000 Hz
Ambient temperature during operation	-25 ... +60 °C
Protection type	IP 65 / IP 67
Connection	Pigtail, 0.3 m, M8, 3-pin
Connection cable	TK ...
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/212988">https://www.di-soric.com/212988</a></b>