




**213023**  
**OTM05-10PS-2R**  
**Retroreflective diffuse sensor**

- Extremely small design
- Red light
- Scanning range preset
- Stainless steel housing
- Can be installed countersunk
- Large temperature range

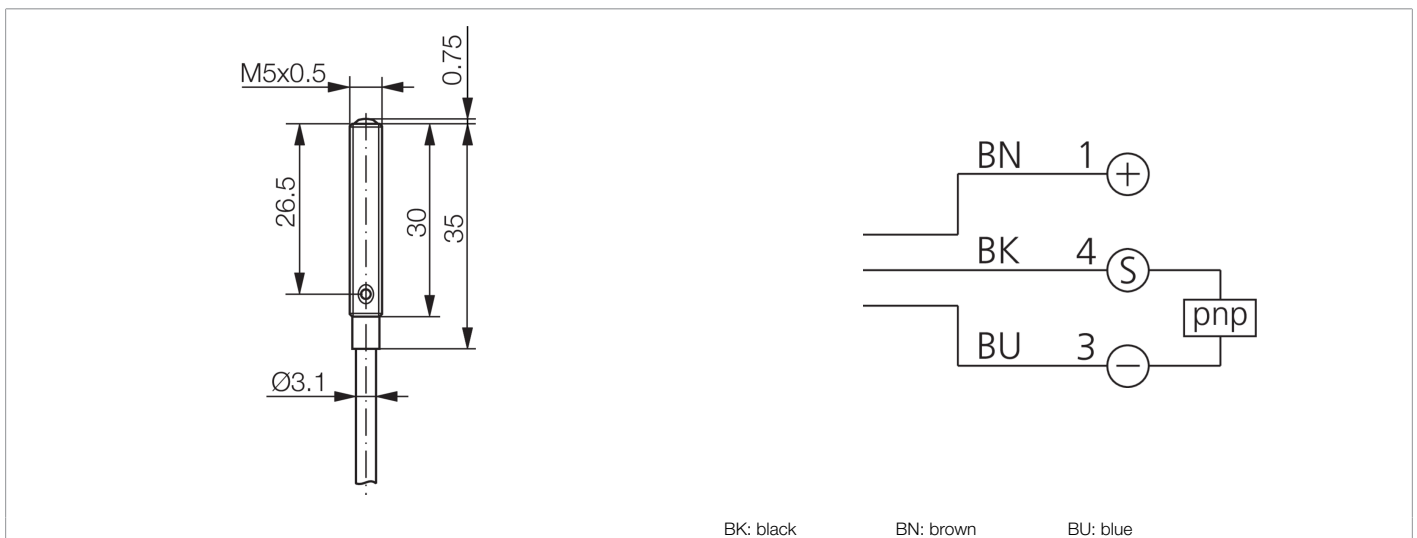

Function												
												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	15 mA
Inverse polarity protection	Yes
Thread	M5 x 0.5
Housing length	35.8 mm
Housing material	Stainless steel (V2A)
Material of cable	Polyurethane
Material	Plastic (Window / optics)
Weight	30 g
Protection class	III, operation on protective low voltage
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Thread
Switching output	pnp, 100 mA, NO
Voltage drop (max.)	2 V
Light source	LED
Color	Red
Wavelength	630 nm
Light spot size	5 x 6 mm (at distance of 10 mm)
Scanning range	10 mm



**213023**  
**OTM05-10PS-2R**  
**Retroreflective diffuse sensor**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Standardized measuring plate	200 x 200 mm (white)
Sensitivity adjustment	no setting elements
Display	LED yellow - Switching output
Switching frequency	1000 Hz
Ambient temperature during operation	-25 ... +65 °C
Protection type	IP 67
Connection	Cable, 2.0 m
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/213023">https://www.di-soric.com/213023</a></b>