




**213056**  
**LAT52-200IU-RB5**  
**Laser distance sensors**

- IO-Link
- Precisely linearized object detection
- Large detection range
- 3 operating modes as an IO-Link parameter
- Laser class 1
- Red-light laser, with small laser spot
- Easy to operate
- Robust metal housing

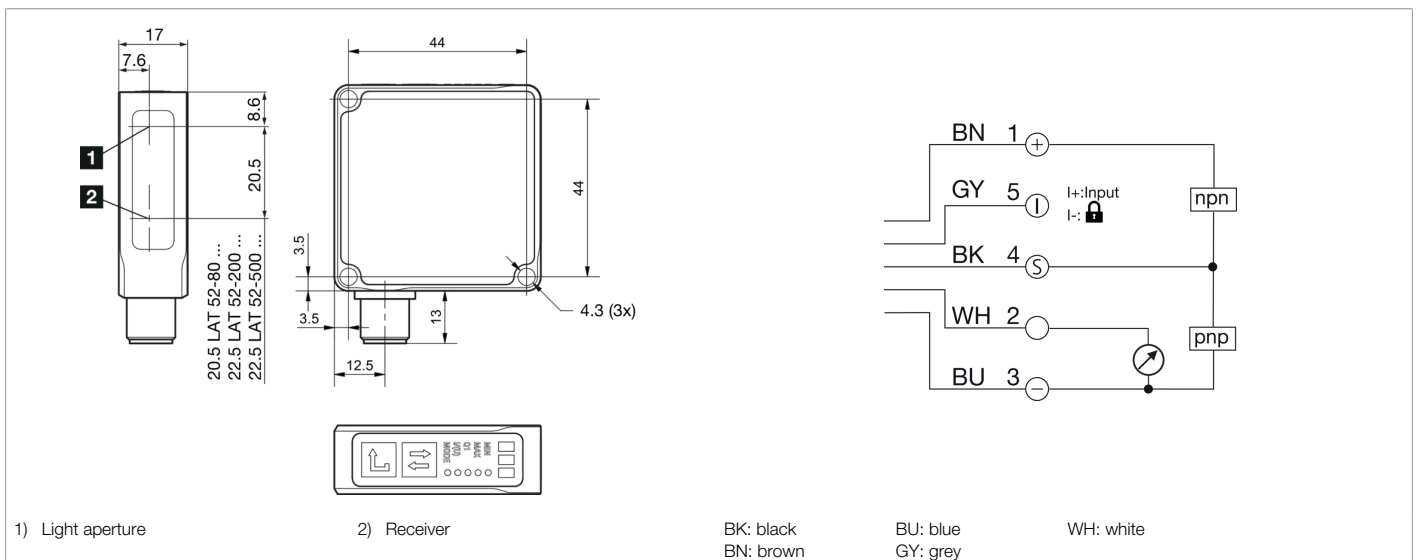

Function												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	18 ... 30 V DC (Supply Class 2)
No-load current (max.)	60 mA
Insulation voltage endurance	500 V
Housing dimensions	51 x 51 x 17 mm
Housing material	Die-cast zinc (Black, powder-coated)
Material window / optics	Plastic
Weight	102 g
Protection class	III, operation on protective low voltage
Approvals	UL
Design	Cuboid design
Characteristics	Radial plug connection
Operation modes	Standard operating modes: General applications, Speed: Quick measurement (measuring rate 1,200 Hz), Power: For dark objects
Switching output	Push-pull (1x), 100 mA, NO/NC
Voltage drop (max.)	2 V
Analog output	0 ... 10 V, 4 ... 20 mA
Interface	<ul style="list-style-type: none"> <li>■ IO-Link V1.1, COM2</li> <li>■ Smart Sensor Profile</li> </ul>
Light source	Laser (Clocked)



**213056**  
**LAT52-200IU-RB5**  
**Laser distance sensors**

<b>Technical data (typ.)</b>		<b>+20°C, 24 V DC</b>	
Laser class		CLASS 1 LASER PRODUCT, 1 (IEC 60825-1:2014 / EN 60825-1:2014)	
Color		Red	
Wavelength		650 nm (Pp < 0.65 mW t = 4 µs)	
Light spot size		Ø 1.0 mm	
Measuring range		50 ... 200 mm (6 to 90 % remission)	
Measuring range 1		50 ... 100 mm (6 to 90 % remission)	
Measuring range 2		100 ... 200 mm (6 to 90 % remission)	
Resolution		0.02 ... 0.05 mm (0.02 mm at 50 ... 100 mm, mode: standard, mean value 16), 0.05 mm with 100 to 200 mm, mode: Standard, median value 16))	
Reproducibility		0.05 mm	
Reproducibility		0.05 mm at 50 ... 100 mm, mode: standard, mean value 16, ± 0.1 mm at 50 ... 100 mm, Mode: Standard, median value 16	
Linearity error		0.07 % (± 0.1 mm at 50 ... 100 mm, Mode: Standard, median value 16, ± 0.2 mm at 100 ... 200 mm, mode: standard, mean value 16)	
Sensitivity adjustment		Keypad	
Display		LED Green - Status, yellow - Switching output, Red - Signal weak	
Measuring frequency		750 Hz, (max. 1200 Hz in Speed sensor mode without filter)	
Readiness delay (max.)		300 ms	
Shock/vibration load		30 g, 10 ... 55 Hz / 0.5 mm	
Ambient temperature during operation		0 ... +50 °C	
Temperature drift		0.04 %/K	
Protection type		IP 67	
Connection		Connector, M12, 5-pin	
Connection cable		VK ... /5	
<b>More information / accessories</b>		<b><a href="https://www.di-soric.com/213056">https://www.di-soric.com/213056</a></b>	