




**213109**  
**KDC 18 K 15L PSK-IBSL**  
**Capacitive proximity switch**

- Detection of electrically conductive and electrically non-conductive materials
- Detection of liquids, powdery and solid materials
- Detection possible even through containers and packaging
- Sensitivity is adjustable
- Electronics integrated
- Protection against short-circuit and reverse polarity
- LED

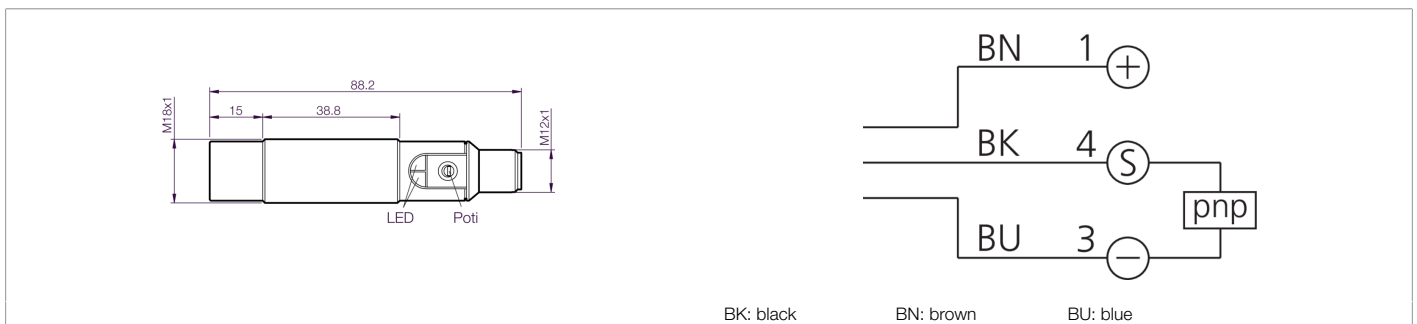

Function													
													 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	13 mA
Inverse polarity protection	Yes
Short-circuit protection	Yes
Insulation voltage endurance	75 V
Installation type	non-flush
Thread	M18 x 1
Housing length	88 mm
Housing material	Plastic (PBT)
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Capacitive
Evaluation	digital
Design	Thread
Scope of delivery	2 x M18 nuts
Switching output	pnp, 100 mA, NO
Switching distance (SN)	15 mm (2 to 15 mm adjustable)
Switching hysteresis (max.)	15 %
Sensitivity adjustment	Potentiometer
Display	LED (Output status)
Switching frequency	100 Hz
Ambient temperature during operation	-25 ... +85 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VK ...



**213109**

**KDC 18 K 15L PSK-IBSL**

**Capacitive proximity switch**

[More information / accessories](#)

<https://www.di-soric.com/213109>