

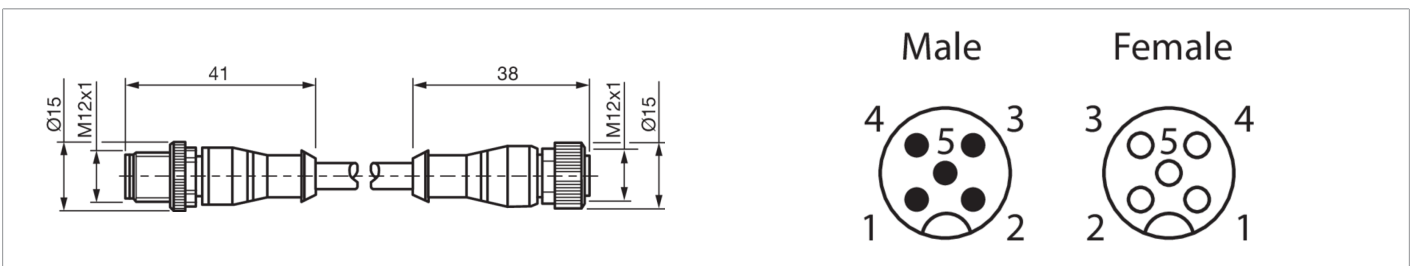
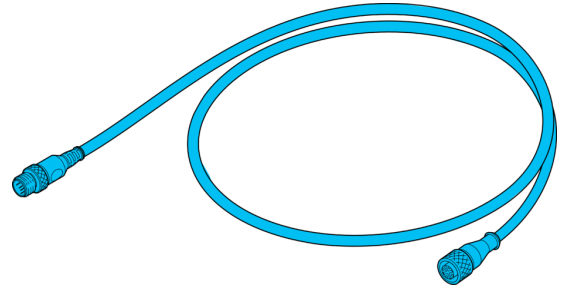




213471

VSHM-Z-0.6/VKM-Z/5

Connection cable

- Connection cable: Connector / coupling
- Sturdy metal union nut
- Flexible lead design
- High protection type



Function													
													 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	125 V AC/DC
Length	600 mm
Material of cable	Polyurethane
Drag chain properties	10 Mio. (Bending cycles)
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Straight / straight
To be used for	Device plug M12, 5-pin
Drag chain compatible	Yes
Ambient temperature during operation	-25 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Connector, M12, 5-pin, A-coded
Connection 2	Socket, M12, 5-pin, A-coded
Cross-section	0.34 x 0.34 mm (5 x)

More information / accessories	<a href="https://www.di-soric.com/213471">https://www.di-soric.com/213471</a>
--------------------------------	---