




200495
DCCK 30 M 20/10 AIK-IBS
Inductive proximity sensor

- Analog voltage output
- Analog current output
- Metal connector
- Integrated amplifier
- Short-circuit protection

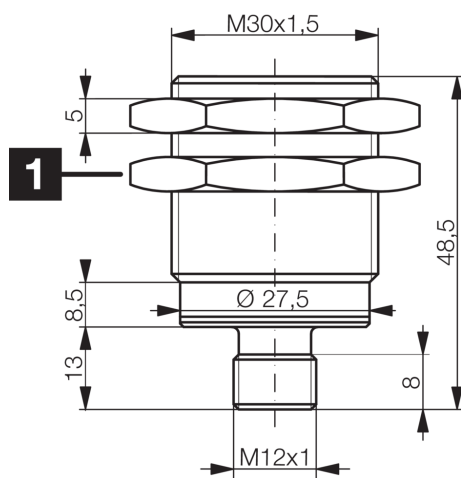

1) Width over flats 36 mm

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	15 ... 30 V DC
Internal power consumption	12 mA
Insulation voltage endurance	According to IEC 60947-5-2 (7.2.3.1)
Installation type	quasi-flush
Thread	M30 x 1.5
Housing length	48.5 mm
Housing material	Brass (CuZn, nickel-plated)
Tightening torque	70 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	analog
Design	Thread
Characteristics	extremely high operating distance
Product series	INA Analog
Analog output	0 ... 10 V, 4 ... 20 mA
Switching distance (SN)	0 ... 20 mm
Standardized measuring plate	60 x 60 x 1 mm
Switching frequency	500 Hz
Ambient temperature during operation	-25 ... +45 °C
Protection type	IP 67



200495

DCCK 30 M 20/10 AIK-IBS

Inductive proximity sensor

Technical data (typ.)

+20°C, 24 V DC

Connection

Connector, M12, 4-pin, A-coded

Connection cable

VK ...

More information / accessories

<https://www.di-soric.com/200495>