


**201118**  
**MS-W-12/4**  
**Plug connector**

- Metal/plastic housing
- Turnable metal thread
- Quick mounting without tools
- 4-pin
- High protection type

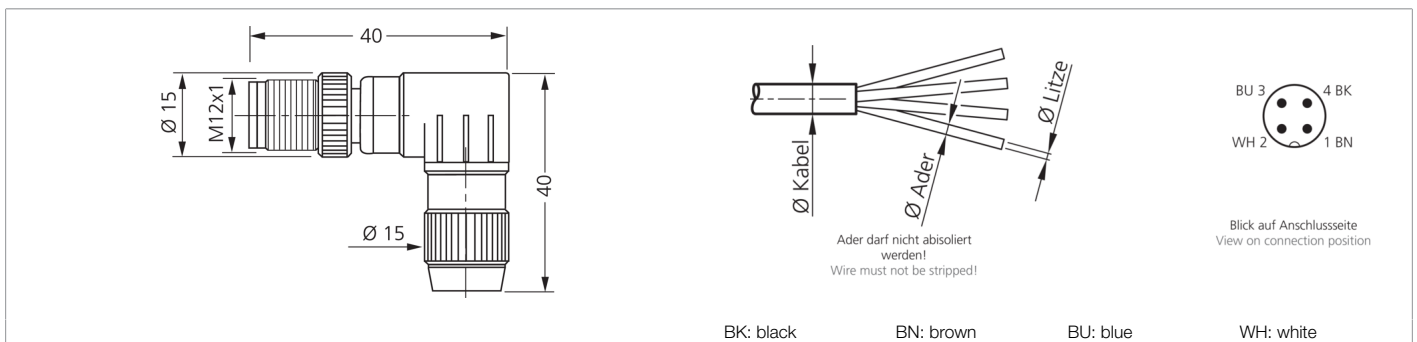

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	32 V DC
Housing material	Metal / Plastic
For Ø cable	4.0 ... 5.1 mm
For Ø wire	1.0 ... 1.6 mm (Wire must not be stripped!)
For strand cross-section	0.25 ... 0.50 mm <sup>2</sup>
Design	Angled
Ambient temperature during operation	-25 ... +85 °C
Protection type	IP 67
Sensor-side connection	Connector, M12 x 1, 4-pin
Control-side connection	Field-wireable, Insulation displacement connectors

More information / accessories	<a href="https://www.di-soric.com/201118">https://www.di-soric.com/201118</a>
--------------------------------	---