



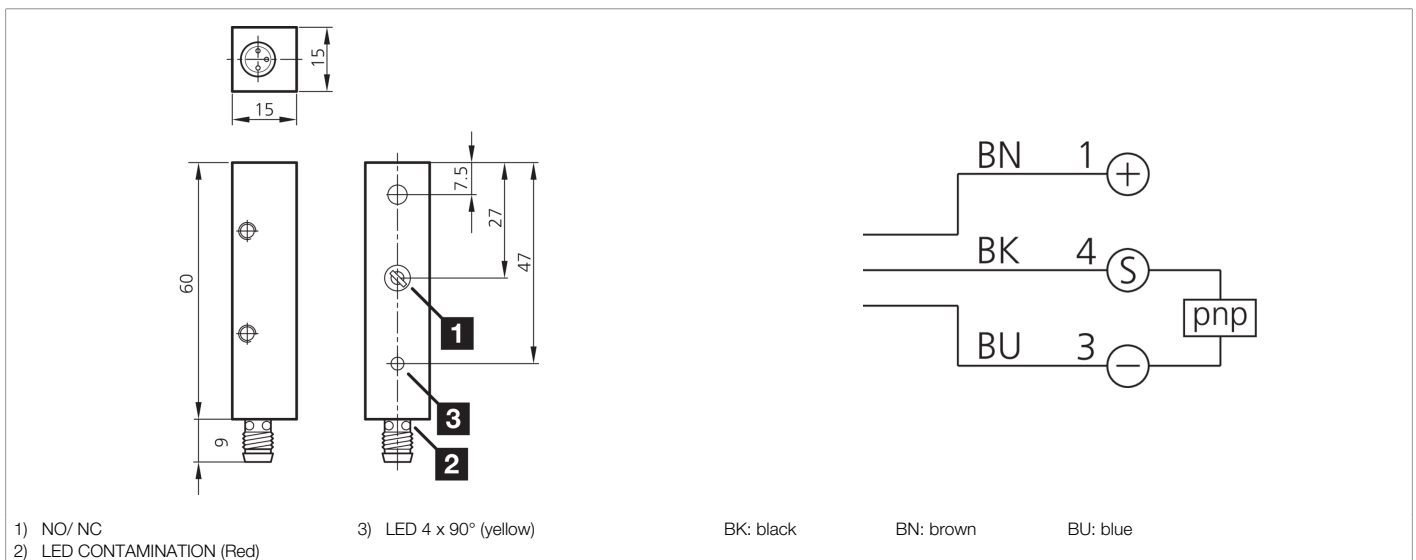

 **201430**  
**OLE Q15 V 50000 P3K-TSSL**  
**Laser through-beam sensor, receiver**

- Compact design
- High resolution, switching accuracy, switching frequency
- Robust metal housing



Function											
											 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	15 ... 28 V DC
No-load current (max.)	24 mA
Housing dimensions	15 x 15 x 60 mm
Housing length	15 mm
Housing height	15 mm
Housing width	60 mm
Housing material	Brass (CuZn, nickel-plated)
Material	Glass (Window)
Protection class	III, operation on protective low voltage
Component	Laser through-beam sensor, receiver
Operating principle	Through-beam sensor
Evaluation	digital
Design	Cuboid design
Consisting of	Receiver
Switching output	pnp, 200 mA, NO/NC, switchable
Ambient light immunity	10 kLx
Range	0 ... 50000 mm
Resolution	Ø 1.0 mm
Sensitivity adjustment	no setting elements



**201430**

**OLE Q15 V 50000 P3K-TSSL**

**Laser through-beam sensor, receiver**

<b>Technical data (typ.)</b>	<b>+20°C, 24 V DC</b>
Switching frequency	1200 Hz
Ambient temperature during operation	+5 ... +45 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
<b>More information / accessories</b>	<b><a href="https://www.di-soric.com/201430">https://www.di-soric.com/201430</a></b>