


 **201541**
OTV 30 K 600 P1K-TSSL
Retroreflective diffuse sensor

- Compact design
- Infrared light
- Sensitivity adjustable, large operating distance
- 12-turn potentiometer

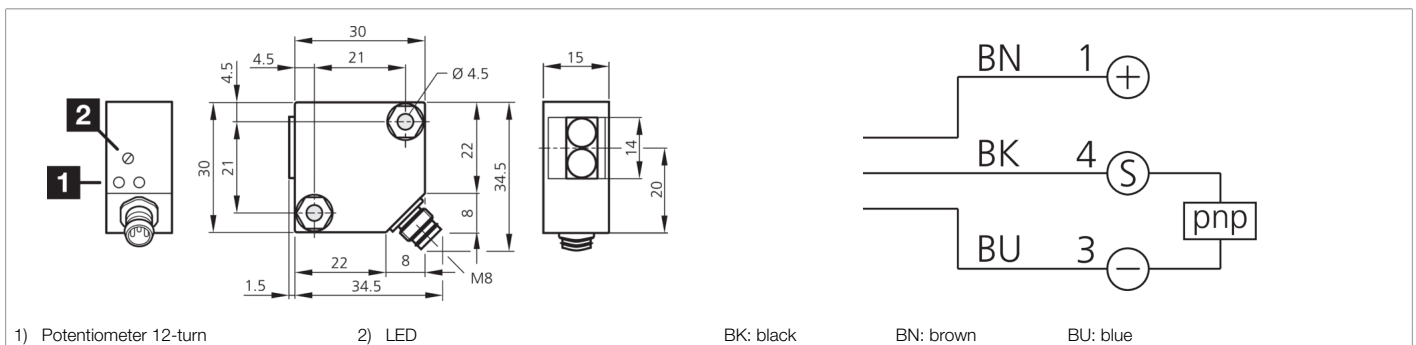

Function											
											 

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 36 V DC
No-load current (max.)	15 mA
Insulation voltage endurance	1000 V
Housing dimensions	30 x 30 x 15 mm
Housing length	30 mm
Housing height	30 mm
Housing width	15 mm
Housing material	Plastic (PBT)
Material	Glass (Window)
Protection class	III, operation on protective low voltage
Operating principle	Retroreflective diffuse sensor
Evaluation	digital
Design	Cuboid design
Switching output	pnp, 200 mA, NO
Voltage drop (max.)	2 V
Light source	LED
Color	Infrared
Wavelength	880 nm
Modulation	Clocked
Ambient light immunity	10 kLx
Scanning range	200 ... 600 mm (adjustable)
Standardized measuring plate	200 x 200 mm (white)
Switching hysteresis (max.)	10 %
Sensitivity adjustment	Potentiometer (12-turn)
Switching frequency	1000 Hz
Response time	0.50 ms

 **201541****OTV 30 K 600 P1K-TSSL****Retroreflective diffuse sensor**

Technical data (typ.)	+20°C, 24 V DC
Release time	0.50 ms
Ambient temperature during operation	-25 ... +55 °C
Temperature drift	0.3 %/K
Protection type	IP 65
Connection	Connector, M8, 3-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/201541