



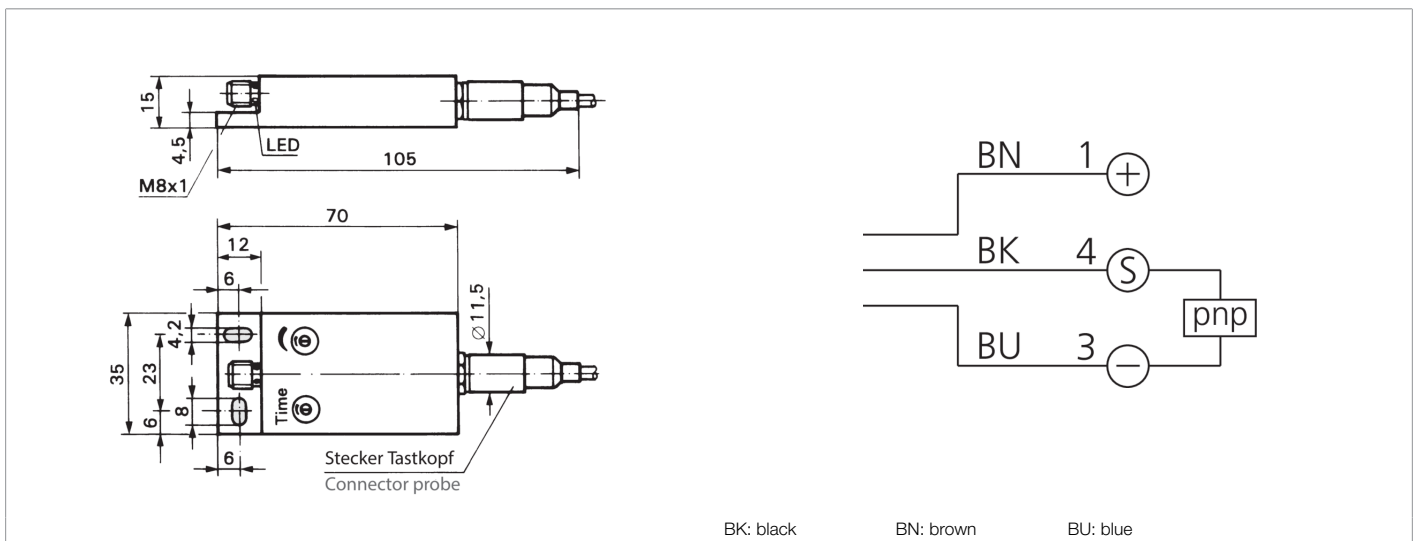

**201576**  
**OVD 70 P1K-TSSL**  
**Amplifier for ring light barrier**

- Metal casing
- Dynamic operating principle
- High resolution
- Short response time
- Sensitivity is adjustable
- Pulse stretching adjustable
- Metal connector
- Ring LED
- High protection type



Function												
												

Technical data (typ.)	+20°C, 24 V DC
Service voltage	20 ... 35 V DC
No-load current (max.)	60 mA
Insulation voltage endurance	500 V
Housing material	Aluminum (Black, Anodized)
Protection class	III, operation on protective low voltage
Operating principle	Dynamic
Evaluation	dynamic
Switching output	pnp, 200 mA, NC
Voltage drop (max.)	2 V
Pulse stretching	1 ... 150 ms adjustable
Response time	0.10 ms
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 65

More information / accessories	https://www.di-soric.com/201576
--------------------------------	---------------------------------