




201734
TKH-Z-5
Connection cable

- Drag chain compatible
- With click-stop device
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

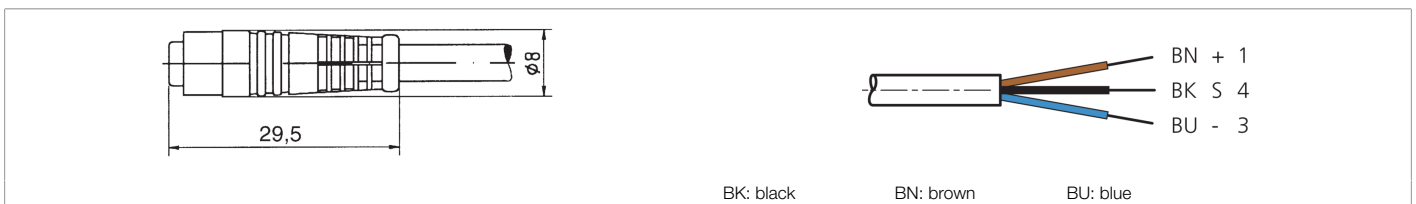

| Function | | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | |    |

| Technical data (typ.) | |
|--------------------------------------|--|
| Service voltage | 50 V AC / 60 V DC |
| Length | 5,000 mm |
| Diameter | Ø 4.1 mm (Diameter) |
| Material of cable | Polyurethane |
| Drag chain properties | 41 mm (Min. bending radius) |
| Protection class | III, operation on protective low voltage |
| Design | Straight / open cable end |
| Characteristics | Click-stop device for thread M8 |
| Drag chain compatible | Yes |
| LED Anzeige | No |
| Ambient temperature during operation | -25 ... +85 °C (Movable, Fixed) |
| Protection type | IP 65 |
| Connection | Click-stop device, M8, 3-pin, A-coded |
| Cross-section | 0.25 mm ² (3 x) |

| More information / accessories |
|---|
| https://www.di-soric.com/201734 |