




201871
VKHM-Z-2.5/4
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

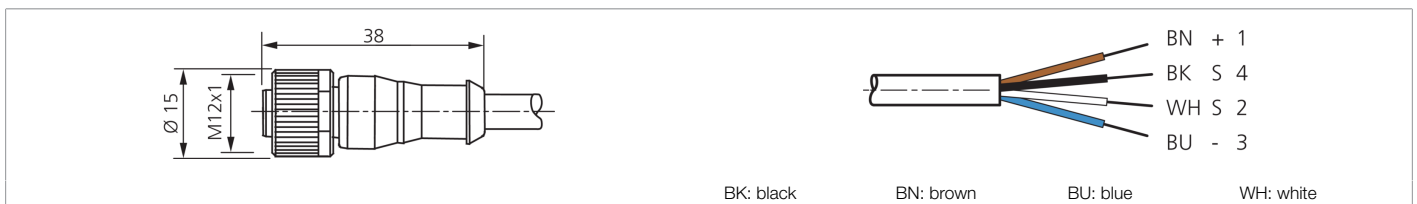

| Function | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |    |

| Technical data (typ.) | |
|--------------------------------------|--|
| Service voltage | 250 V AC/DC |
| Length | 2,500 mm |
| Diameter | Ø 4.5 mm (Diameter) |
| Thread | M12 |
| Material of cable | Polyurethane |
| Drag chain properties | 45 mm (Min. bending radius) |
| Protection class | III, operation on protective low voltage |
| Design | Straight / open cable end |
| Characteristics | Metal nut |
| Drag chain compatible | Yes |
| LED Anzeige | No |
| Ambient temperature during operation | -25 ... +85 °C (Movable, Fixed) |
| Protection type | IP 65 / IP 66K / IP 67 |
| Connection | Socket, M12, 4-pin, A-coded |
| Cross-section | 0.34 mm ² (4 x) |

| More information / accessories | https://www.di-soric.com/201871 |
|--------------------------------|---|
|--------------------------------|---|