





**201931**  
**WRB 110 SQ-90-20-0.6**  
**Glass fiber optics**

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

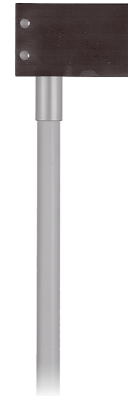

Technical data (typ.)		+20°C, 24 V DC	
Length		300 mm	
Dimension fiber bundle		20 mm x 0.6 mm	
Housing length		40 mm	
Housing height		10 mm	
Housing width		25 mm	
Light aperture		radial	
Bending radius		> 3 x tube-Ø	
Material of fiber		Glass fibers	
Material		<ul style="list-style-type: none"> <li>■ Aluminum (Sensor probe)</li> <li>■ Silicone-metal sleeve (Coating)</li> </ul>	
Operating principle		Diffuse sensor	
Design		Cuboid design	
Single fiber		Ø 0.05 mm	
To be used for		Amplifiers for glass fiber optics	
Opening angle		67°	
Scanning range		200 mm	
Temperature resistance		-40 ... +180 °C (temporarily up to +250 °C)	
Protection type		IP 67	
More information / accessories		<a href="https://www.di-soric.com/201931">https://www.di-soric.com/201931</a>	