




202045
WRB 210 M-1.5-1.0
Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

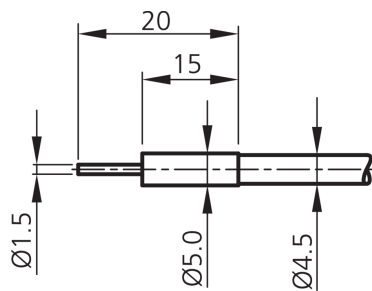

| Technical data (typ.) | | +20°C, 24 V DC |
|--------------------------------|--|--|
| Length | | 300 mm |
| Dimension fiber bundle | | Ø 1.0 mm |
| Housing length | | 15 mm |
| Light aperture | | axial |
| Mounting diameter | | Ø 5 mm |
| Bending radius | | > 10 x tube-Ø |
| Material of fiber | | Glass fibers |
| Material | | <ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ metal sleeve (Coating) |
| Operating principle | | Through-beam sensor |
| Design | | Cylinder |
| Single fiber | | Ø 0.05 mm |
| To be used for | | Amplifiers for glass fiber optics |
| Opening angle | | 67° |
| Scanning range | | 150 mm |
| Temperature resistance | | -40 ... +180 °C (temporarily up to +300 °C) |
| Protection type | | IP 60 |
| More information / accessories | | https://www.di-soric.com/202045 |