

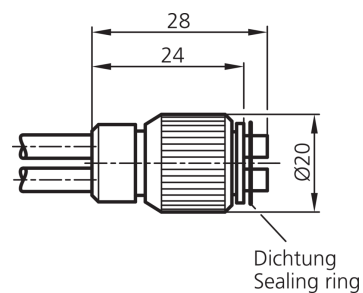




202083
WRB 220 MQ-90-20-0.3
Glass fiber optics

- High-quality glass fibers
- Resistant to high temperatures
- Robust, highly flexible

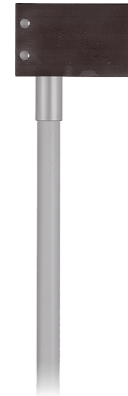

| Technical data (typ.) | +20°C, 24 V DC |
|---------------------------------------|---|
| Length | 600 mm |
| Dimension fiber bundle | 20 mm x 0.3 mm |
| Housing length | 40 mm |
| Housing height | 10 mm |
| Housing width | 25 mm |
| Light aperture | radial |
| Bending radius | > 10 x tube-Ø |
| Material of fiber | Glass fibers |
| Material | <ul style="list-style-type: none"> ■ Aluminum (Sensor probe) ■ metal sleeve (Coating) |
| Operating principle | Through-beam sensor |
| Design | Cuboid design |
| Single fiber | Ø 0.05 mm |
| To be used for | Amplifiers for glass fiber optics |
| Opening angle | 67° |
| Scanning range | 1100 mm |
| Temperature resistance | -40 ... +180 °C (temporarily up to +300 °C) |
| Protection type | IP 60 |
| More information / accessories | https://www.di-soric.com/202083 |