




202160
WRBT 2000 K-M6-1.0
Plastic fiber optics

- Value for money

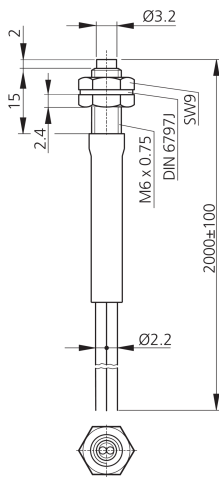

Technical data (typ.)

+20°C

Length	2,000 mm
Thread	M6 x 0.75
Light aperture	axial
Bending radius	> 25 mm
Material of fiber	PMMA
Material	<ul style="list-style-type: none"> VA (Thread sleeve) PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Single fiber-optics	Ø 2.2 mm
Single fiber	Ø 1.0 mm (151 x 0.075 mm)
To be used for	Device series OLV-K Amplifier
Opening angle	56°
Range	200 mm
Temperature resistance	-55 ... +70 °C

More information / accessories

<https://www.di-soric.com/202160>