




202427
OGUTI 031 FP3K-TSSL
Fork light barrier

- Fast, simple, safe: Sensitivity adjustment via teach key
- Auto-teach during a running process
- Remote teach option with key-lock function
- LED indicator for the teach procedure
- Detection of even the smallest objects
- Large functional reserve
- Light/dark switching

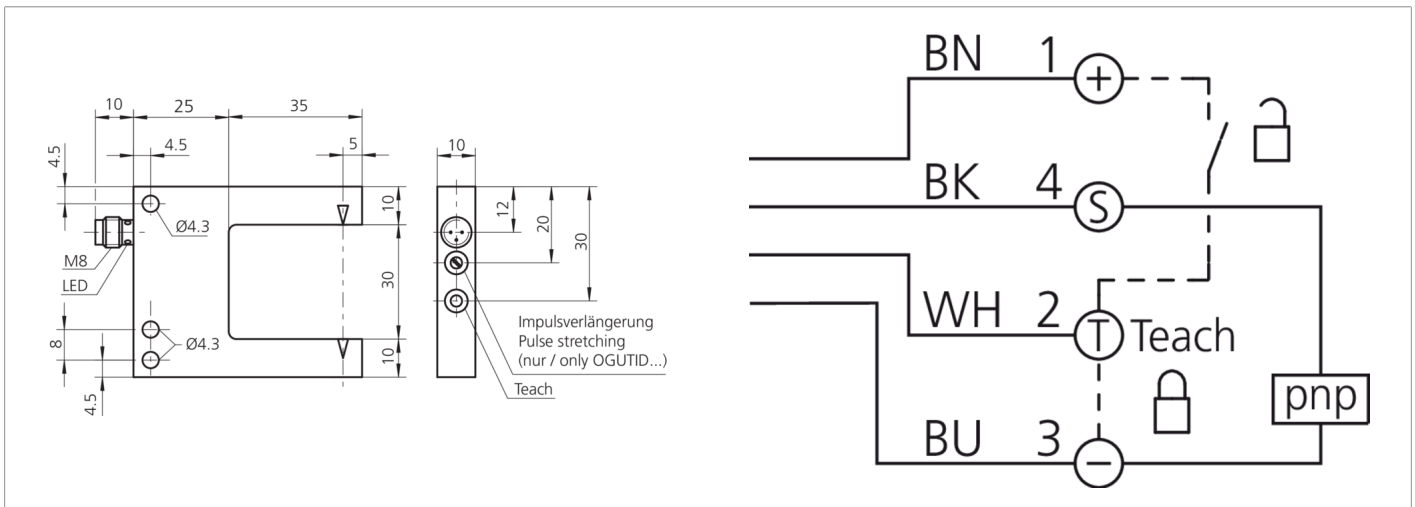

Function										

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Leg length internal	35 mm
Housing dimensions	50 x 60 x 10 mm
Housing length	60 mm
Housing height	50 mm
Housing width	10 mm
Housing material	Die-cast zinc (Black, powder-coated)
Protection class	III, operation on protective low voltage
Approvals	UL
Operating principle	Optical
Evaluation	digital
Design	Fork
Switching output	pnp, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Color	Red
Modulation	Clocked
Ambient light immunity	20 kLx
Fork opening	30 mm
Resolution	Ø 0.3 mm

**202427****OGUTI 031 FP3K-TSSL****Fork light barrier**

Technical data (typ.)	+20°C, 24 V DC
Switching hysteresis (max.)	< 0.1 mm
Reproducibility	0.03 mm
Sensitivity adjustment	Teach key + remote teach
Switching frequency	< 3000 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M8, 4-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/202427