



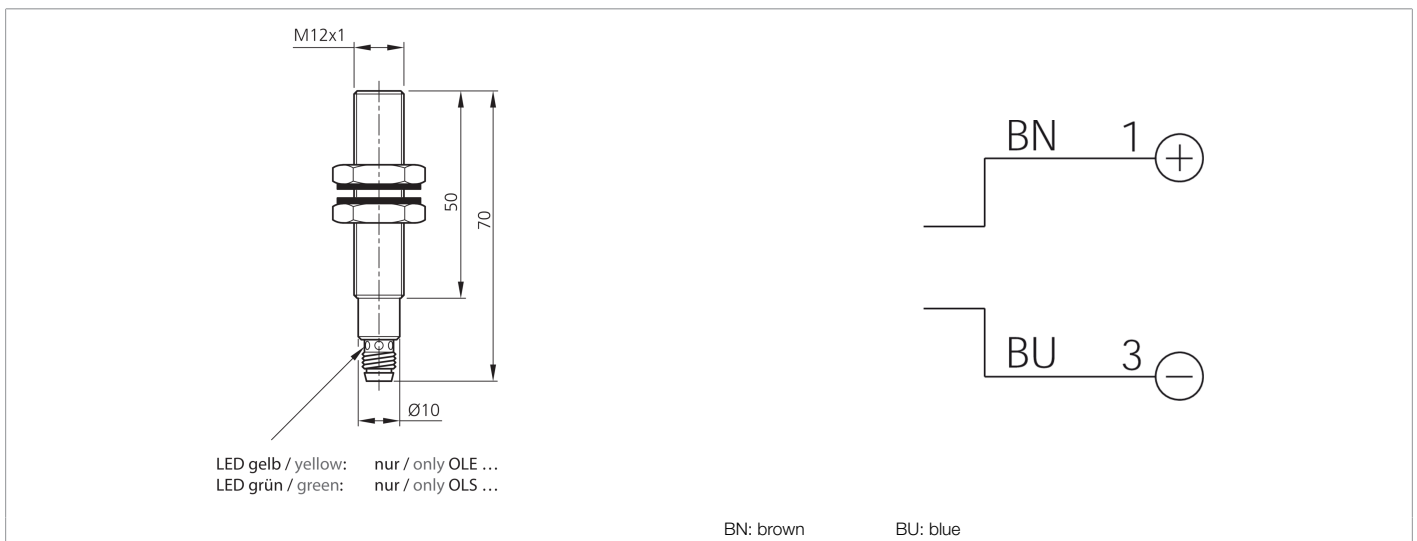

202984
OLS 12 V 2000-TSSL
Laser through-beam sensor, transmitter

- Compact design
- Collimated red-light laser
- Visible laser spot
- Robust metal housing

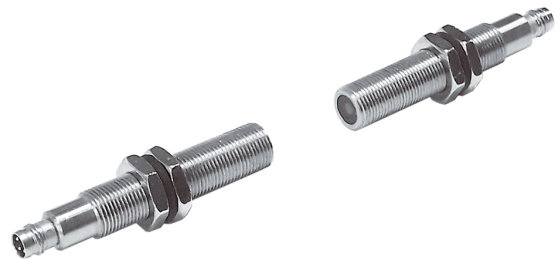

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	500 V
Thread	M12 x 1
Housing material	Stainless steel
Protection class	III, operation on protective low voltage
Operating principle	Through-beam sensor
Evaluation	digital
Design	Thread
Consisting of	Transmitter
Light source	Laser
Laser class	1 (IEC 60825-1)
Color	red
Wavelength	670 nm
Modulation	Clocked
Laser beam divergence	2 mrad
Range	0 ... 2000 mm
Sensitivity adjustment	no setting elements
Switching frequency	2000 Hz
Ambient temperature during operation	0 ... +50 °C



202984

OLS 12 V 2000-TSSL

Laser through-beam sensor, transmitter

Technical data (typ.)

+20°C, 24 V DC

Protection type

IP 67

Connection

Connector, M8, 3-pin

Connection cable

TK ...

More information / accessories

<https://www.di-soric.com/202984>