




**203954**  
**BSHM-W-2/8A**  
**Connection cable**

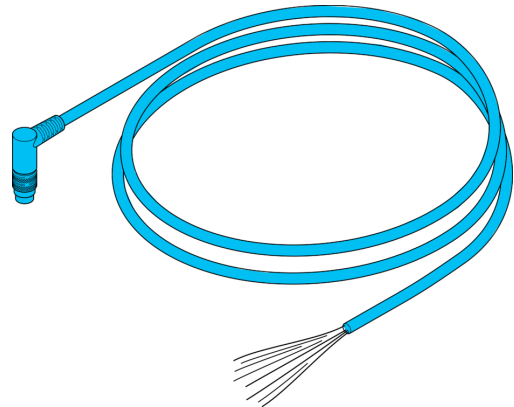

Function													
													 

Technical data (typ.)	
Length	2,000 mm
Material	<ul style="list-style-type: none"> <li>■ PU sleeve (Coating)</li> <li>■ Polyurethane (Connector)</li> </ul>
Component	Connection cable
Design	Angled / open cable end
To be used for	FSB 10 M G1-B8, FSB 50 M 60 G3-B8, FSB 50 M G3-B8, FS 50 M 60 G3-B8, FS 50 M G3-B8, FS 12-100-1 M G3-B8, FS 12-100-1 M G3-B8-E, FS 12-100-2 M G3-B8, FS 12-100-2 M G3-B8-PB
For FSB 10 M G1-B8	To be used
For FSB 50 M 60 G3-B8	To be used
For FSB 50 M G3-B8	To be used
For FS 50 M 60 G3-B8	To be used
For FS 50 M G3-B8	To be used
For FS 12-100-1 M G3-B8	To be used
For FS 12-100-1 M G3-B8-E	To be used
For FS 12-100-2 M G3-B8	To be used
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Connector, M9, 8-pin
Connection 2	flying leads
Cross-section	0.14 x 0.14 mm (8 x)
More information / accessories	
<a href="https://www.di-soric.com/203954">https://www.di-soric.com/203954</a>	