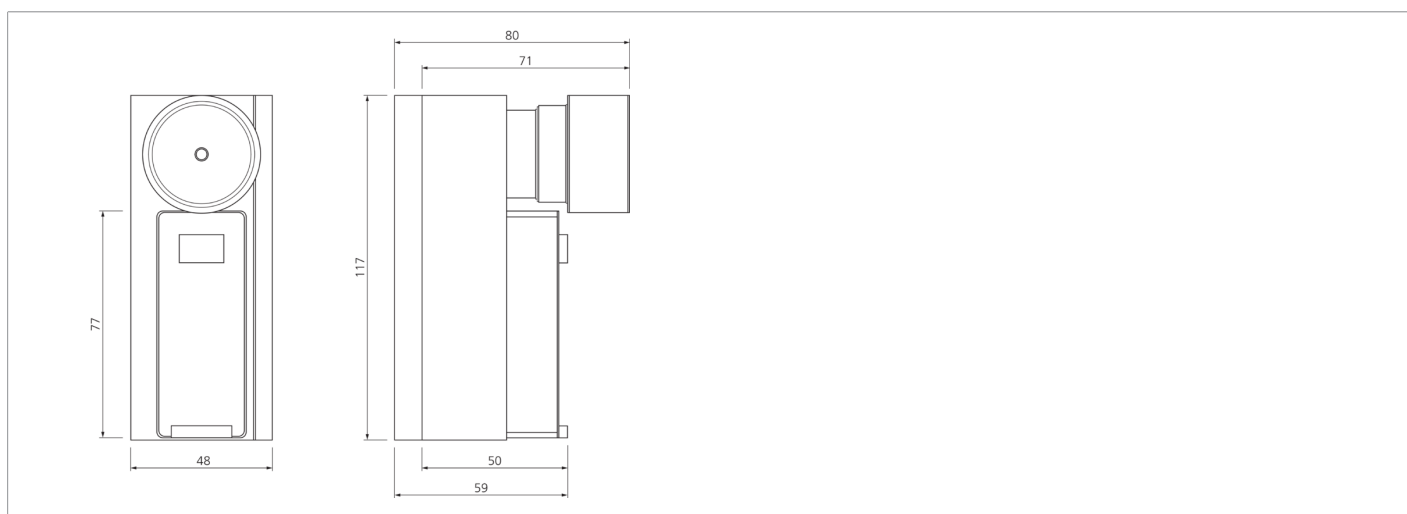


 **205532****LAD 4****Laser alignment device**

- Range up to 100 m
- Enables a fast and reliable optical alignment
- Recommended for use over long distances or using deflector mirrors
- Self-sufficient power supply

**Function**

																				
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	---	---	---

Technical data (typ.)

Service voltage	3 V DC
Power supply	1.5 V alkaline batteries type AAA (2x)
Mounting	Quick attachment to the light curtain / grille or the mounting column
Housing dimensions	117 x 48 x 80 mm
Housing material	Plastic
Operating principle	Laser alignment device
To be used for	all light curtains and light grids, Mounting columns FMC, Deflection mirrors
Scope of delivery	Multi-language operating instructions, 2 x 1.5 V alkaline batteries type AAA
Light source	Laser
Laser class	2 (IEC 60825-1)
Color	red
Wavelength	650 nm
Modulation	for positioning
Laser beam divergence	< 0.5 mrad
Laser power	1000 µW
Range	100000 mm

More information / accessories<https://www.di-soric.com/205532>