



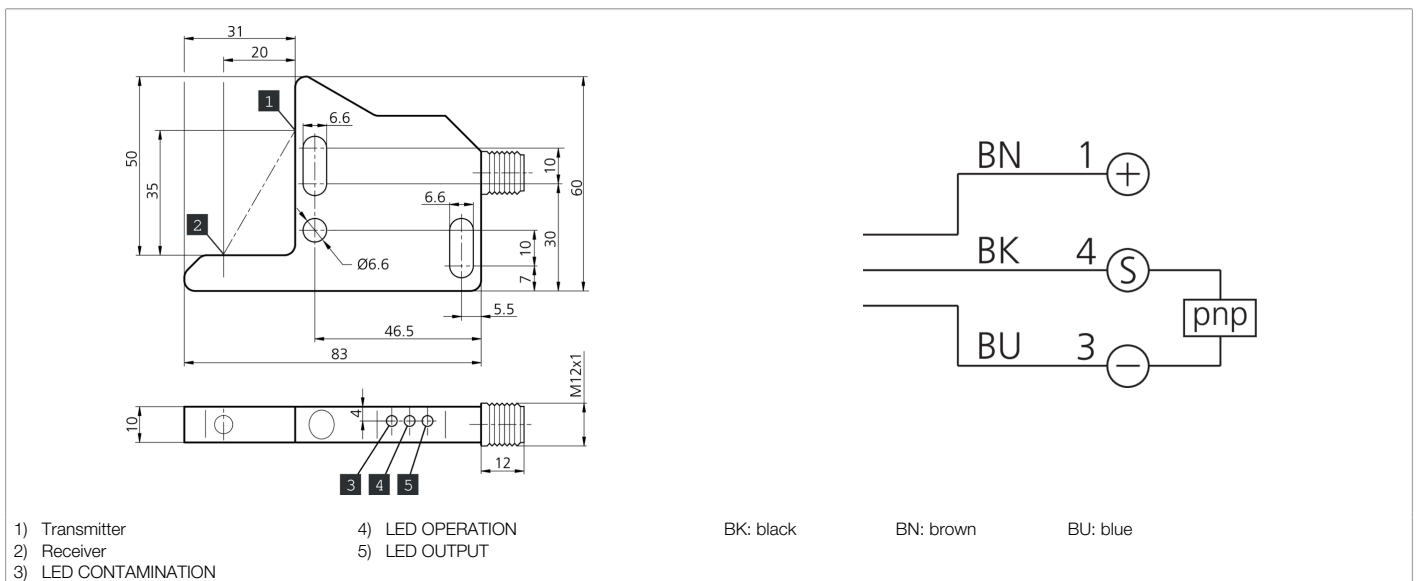

205607
OGL 50/31-0 P2K-IBS
High-performance angled light barriers

- High function reserve
- Extremely dirt-resistant
- Optical axis approachable in x-, y- and z-direction
- Universal mounting
- Robust metal housing



Function											

Technical data (typ.)		+20°C, 24 V DC	
Service voltage		10 ... 35 V DC (Supply Class 2)	
No-load current (max.)		20 mA	
Insulation voltage endurance		500 V	
Leg length internal		50/31 mm	
Housing dimensions		60 x 83 x 10 mm	
Housing length		83 mm	
Housing height		60 mm	
Housing width		10 mm	
Housing material		Die-cast zinc	
Protection class		III, operation on protective low voltage	
Operating principle		Optical	
Evaluation		digital	
Design		Angle	
Characteristics		High transmit power and dirt penetration	
Switching output		pnp, 200 mA, NO	
Voltage drop (max.)		2 V	
Light source		LED	
Color		Infrared	
Ambient light immunity		5 kLx	

 **205607****OGL 50/31-0 P2K-IBS****High-performance angled light barriers**

Technical data (typ.)	+20°C, 24 V DC
Range	40 mm (optical axis)
Sensitivity adjustment	no setting elements
Switching frequency	50 Hz
Ambient temperature during operation	-10 ... +60 °C
Protection type	IP 67
Connection	Connector, M12, 4-pin
Connection cable	VK ...
More information / accessories	https://www.di-soric.com/205607