
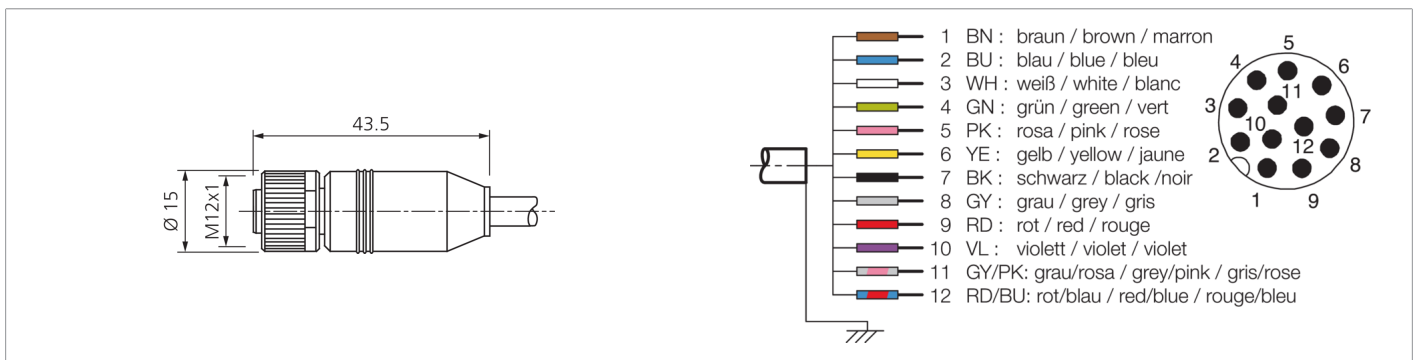


**206911**  
**VKSM-Z-5/12-A**  
**I/O cable**

- Shielded
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

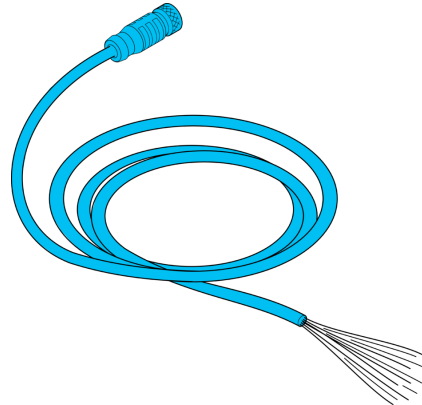

Function										

Technical data (typ.)	
Service voltage	30 V AC/DC
Length	5,000 mm
Diameter	Ø 6.5 mm (Diameter)
Thread	M12
Material of cable	Polyurethane
Drag chain properties	65 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
LED Anzeige	No
Ambient temperature during operation	-25 ... +85 °C (Movable, Fixed)
Protection type	IP 65 / IP 66K / IP 67
Connection	Socket, M12, 12-pin, A-coded
Cross-section	0.14 mm <sup>2</sup> (12 x)

More information / accessories	<a href="https://www.di-soric.com/206911">https://www.di-soric.com/206911</a>
--------------------------------	---