
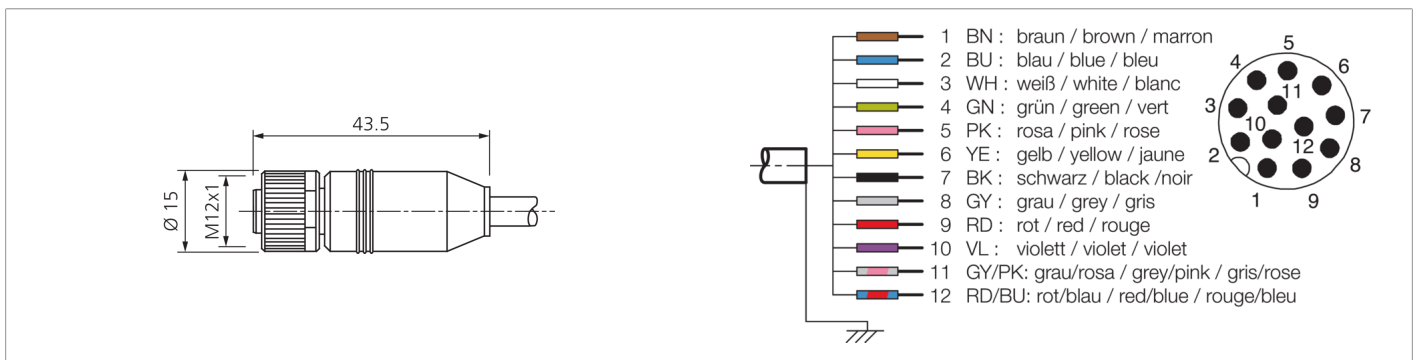


**207457**  
**VKSM-Z-20/12-A**  
**I/O cable**

- Shielded
- Drag chain compatible
- Sturdy metal union nut
- Durable PU coating
- Flexible lead design
- Good stripping properties
- High protection type
- Gold-plated plug-in contacts

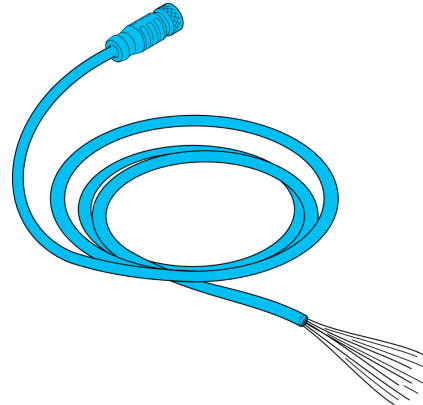

Function												

Technical data (typ.)	
Service voltage	< 30 V AC/DC
Length	20,000 mm
Diameter	$\varnothing 6.5$ mm (Diameter)
Thread	M12
Material of cable	Polyurethane
Drag chain properties	65 mm (Min. bending radius)
Protection class	III, operation on protective low voltage
Design	Straight / open cable end
Characteristics	Shielded, Metal nut
LED Anzeige	No
Ambient temperature during operation	-25 ... +80 °C (Movable, Fixed)
Protection type	IP 67
Connection	Socket, M12, 12-pin, A-coded
Cross-section	0.14 mm <sup>2</sup> (12 x)

More information / accessories	<a href="https://www.di-soric.com/207457">https://www.di-soric.com/207457</a>
--------------------------------	---