




207555

FMC-S2000

Mounting column with deflection mirror

- For the realization of circumferential protective fields with up to 4 sides
- Not more than one safety light curtain / grid necessary
- Special models with mirrors that have a shatter protection film are available on request
- Robust column made of aluminum extrusion poles
- With adjustable angular orientation
- Optical power reduction factor 15% for each mirror
- Integrated spherical spirit level to check the correct vertical column axis

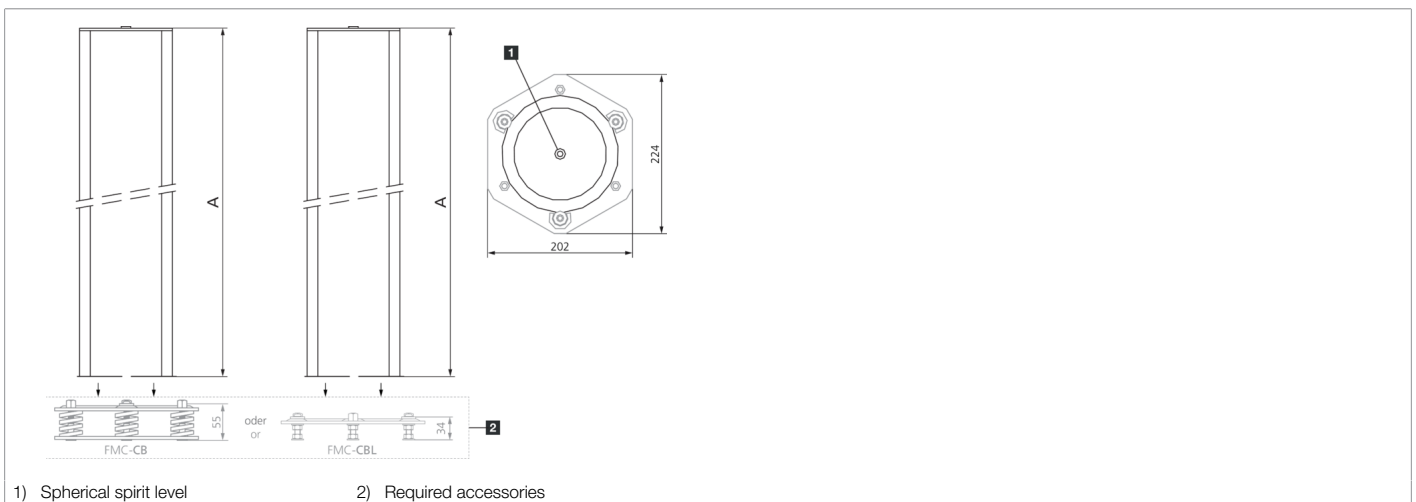

1) Spherical spirit level

2) Required accessories

Technical data (typ.)

Quantity	1 (Deflection mirrors)
Total height (A)	1970 mm
Housing material	Aluminum rod profile (Epoxy powder coating) / Plastic
Operating principle	Mounting column with deflection mirror
Characteristics	built-in spherical spirit level
To be used for	all light curtains with a protected field height up to 1,810 mm
Design	pre-assembled
Scope of delivery	Assembly instructions, Fixing material
Absorption factor	15 %
Ambient temperature during operation	-10 ... +50 °C (Mirror)

More information / accessories

<https://www.di-soric.com/207555>