207753
VSHM-W-2.0/VKM-W/4
Connection cable

- Drag chain compatible
- Sturdy metal union nut
- Flexible lead design
- High protection type

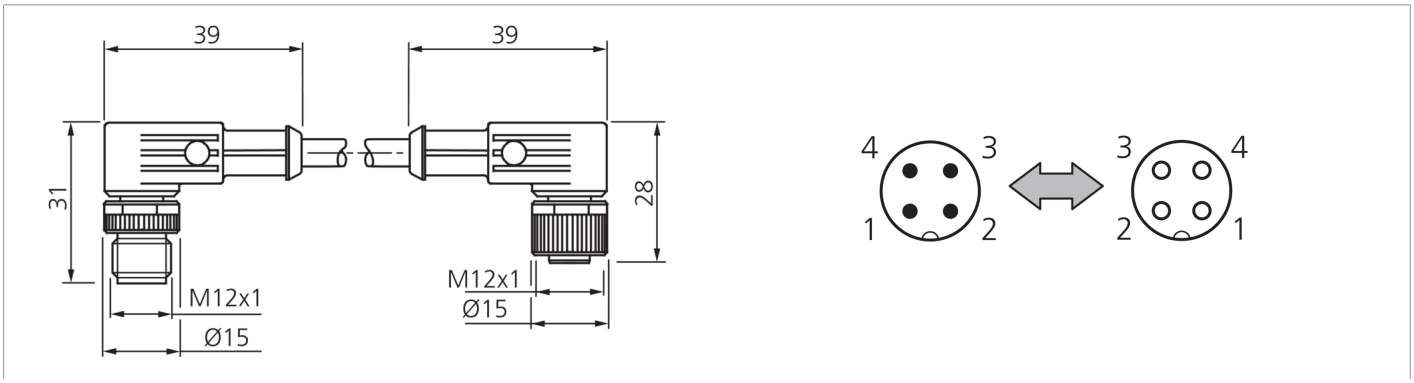

Function

Technical data (typ.)	+20°C
Service voltage	< 250 V AC/DC
Length	2,000 mm
Diameter	Ø 4.6 mm (Diameter)
Thread	M12 x 1
Material of cable	Polyurethane
Material	Polyurethane (Connector)
Drag chain properties	■ < 2 Mio. (Bending cycles) ■ 3.3 m/s (Max. moving speed) ■ 5 m/s² (Max. acceleration)
Protection class	III, operation on protective low voltage
Component	Cable connection
Design	angled / angled
Characteristics	Metal nut
Drag chain compatible	Yes
Ambient temperature during operation	-5 … +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Connector, M12, 4-pin, A-coded
Connection 2	Socket, M12, 4-pin, A-coded
Cross-section	0.34 x 0.34 mm (4 x)

More information / accessories	https://www.di-soric.com/207753

© di-soric . Right to change reserved