






209198
SR-0
Interface relay

- Can be used for all safety light curtains / grids with External Device Monitoring (EDM)
- Function with two guided-contact safety relays
- Control and monitoring directly through the light curtain / light grid
- Inverse polarity protection

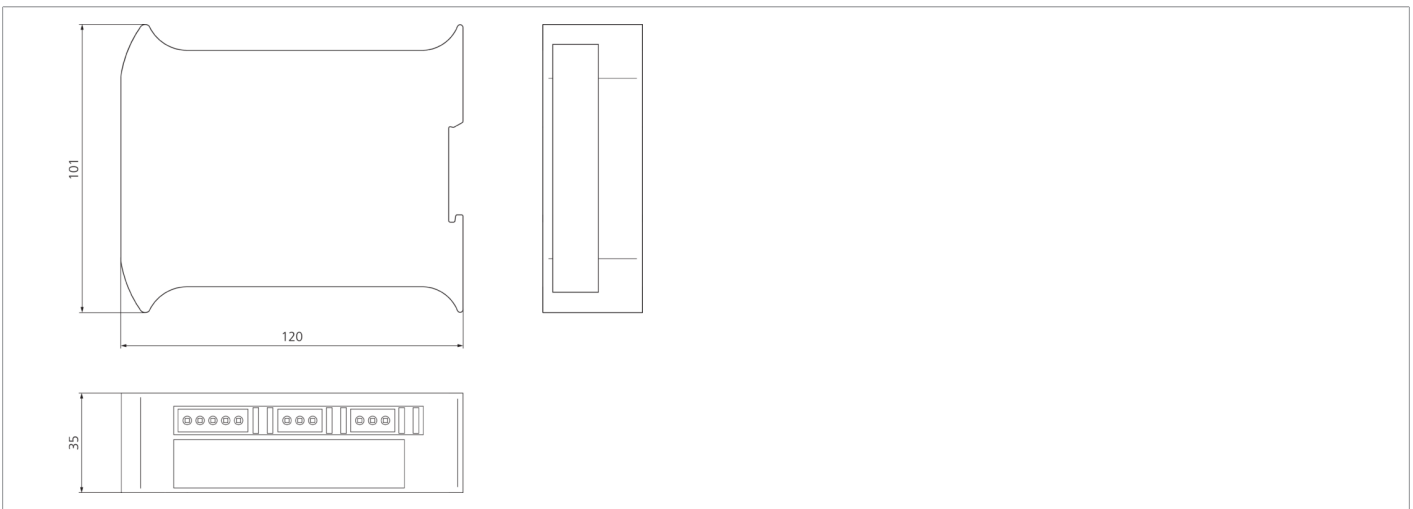

Function												
												  

Technical data (typ.)	+20°C, 24 V DC
Service voltage	19.2 ... 28.8 V DC
Inverse polarity protection	Yes
Mounting	on DIN-rail in accordance with EN 50022-35 standard
Housing dimensions	101 x 35 x 120 mm
Operating principle	Interface relay
Characteristics	Each NO safety switching output is interrupted twice by two relays
To be used for	Safety light curtains / grids SLI... and SLIH...
External device (relay) monitoring - EDM	Feedback output (1x NC)
Scope of delivery	Multi-language operating instructions
Safety relay outputs	NO (2x) + NC (1x), 2 A / 250 V AC
Reaction time	< 20 ms
Ambient temperature during operation	0 ... +55 °C
Protection type	IP 20 (Housing) / IP 2X (Terminal block)
Connection	on terminal blocks

More information / accessories	https://www.di-soric.com/209198
--------------------------------	---