




209224
OH 31 K 200 N3-T4
Diffuse sensor with background suppression

- Mechanical background suppression
- Compact design
- Red light
- Sensitivity is adjustable
- Switch for light/dark switching
- Standardized hole spacing 25.4 mm

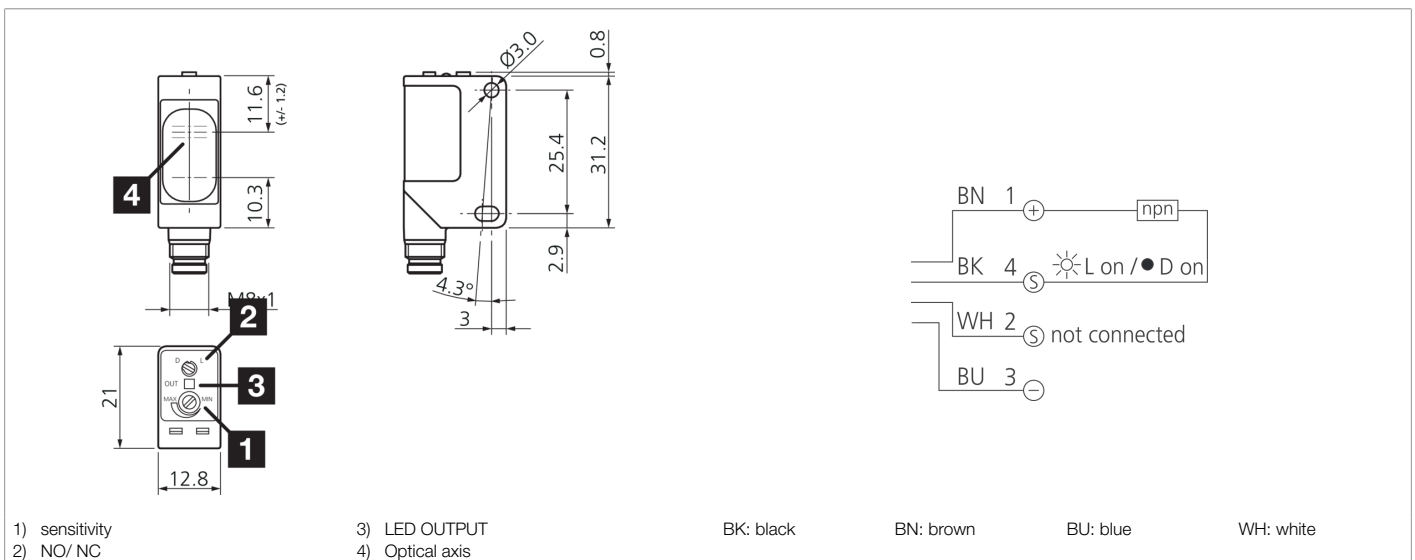

Function										
										CE

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 30 V DC
No-load current (max.)	30 mA
Insulation voltage endurance	1000 V
Housing dimensions	31.2 x 21 x 12.8 mm
Housing length	21 mm
Housing height	31.2 mm
Housing width	12.8 mm
Housing material	Plastic (PA, 6.6)
Material	PMMA (Window)
Protection class	III, operation on protective low voltage
Operating principle	Diffuse sensor with background suppression
Evaluation	digital
Design	Cuboid design
Switching output	npn, 100 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Light source	LED
Color	red
Wavelength	630 nm
Modulation	Clocked



209224

OH 31 K 200 N3-T4

Diffuse sensor with background suppression

Technical data (typ.)	+20°C, 24 V DC
Background suppression	Yes
Ambient light immunity	3 kLx Halogen light, 10 kLx Sunlight
Switching distance	adjustable
Scanning range	30 ... 200 mm
Standardized measuring plate	200 x 200 mm (white)
Switching hysteresis (max.)	10 %
Sensitivity adjustment	Potentiometer
Switching frequency	1000 Hz
Response time	0.50 ms
Release time	0.50 ms
Ambient temperature during operation	-25 ... +70 °C
Temperature drift	0.2 mm/K
Protection type	IP 67
Connection	Connector, M8, 4-pin
More information / accessories	https://www.di-soric.com/209224