




209872

LLH 51 M 200 G3-T3

Line laser diffuse sensor with background suppression

- Detection of objects with irregular breakouts, breakthroughs or holes
- Detecting non-guided parts
- 30 x 1.5 laser line at a scanning distance of 200 mm
- Automatic adjustment of transmitting power
- Red-light laser
- Laser class 1
- 4-turn potentiometer
- Electronic background suppression
- Light/dark switching
- Robust metal housing

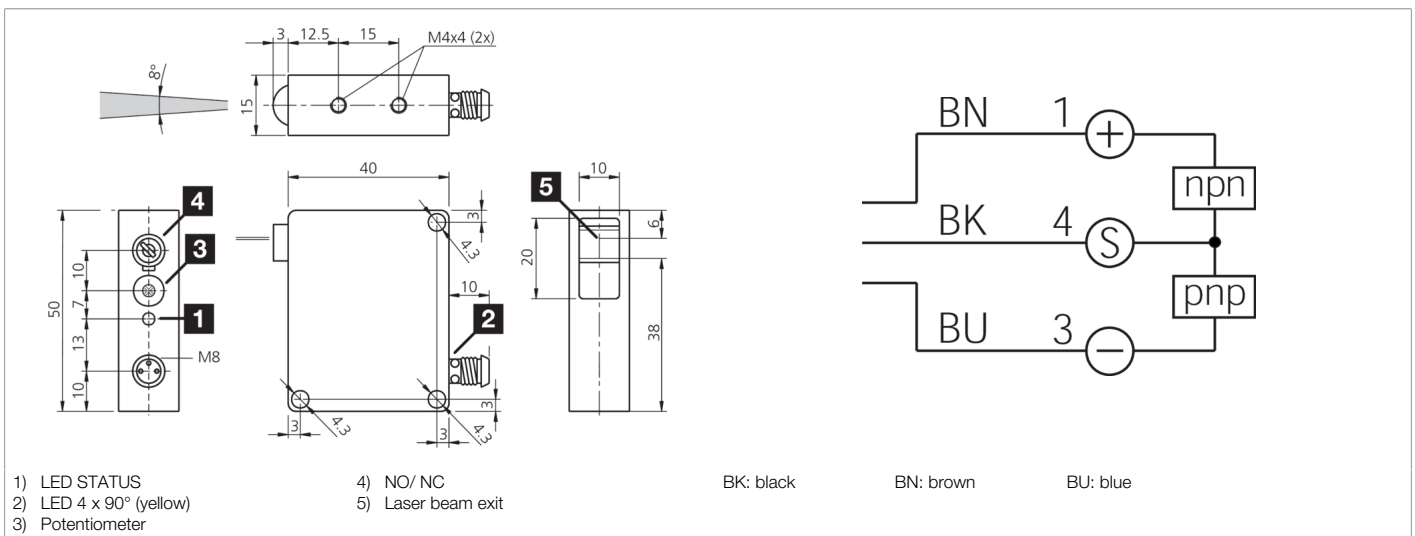

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC
No-load current (max.)	25 mA (24 V DC)
Insulation voltage endurance	500 V
Housing dimensions	50 x 40 x 15 mm
Housing length	40 mm
Housing height	50 mm
Housing width	15 mm
Housing material	Die-cast zinc (Black, painted)
Material	Glass (Protection optics)
Protection class	III, operation on protective low voltage
Operating principle	Diffuse sensor with background suppression
Evaluation	digital
Design	Cuboid design
Switching output	Push-pull, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Light source	Laser
Laser class	CLASS 1 LASER PRODUCT, 1 (IEC 60825-1:2014 / EN 60825-1:2014)
Color	red
Wavelength	650 nm
Modulation	Clocked



209872

LLH 51 M 200 G3-T3

Line laser diffuse sensor with background suppression

Technical data (typ.)	+20°C, 24 V DC
Background suppression	Yes
Ambient light immunity	5 kLx
Scanning range	50 ... 200 mm
Switching hysteresis (max.)	6 %
Sensitivity adjustment	Potentiometer
Display	LED Green - Operation, yellow - Switching output
Switching frequency	500 Hz
Ambient temperature during operation	-10 ... +50 °C
Protection type	IP 67
Connection	Connector, M8, 3-pin
Connection cable	TK ...
More information / accessories	https://www.di-soric.com/209872