






**209955**  
**KLTR-M4-T2-0.5K**  
**Plastic fiber optics**

- Low installation depth
- 90° deflection
- Small parts detection
- Optional attachment optics
- Cutting knife included

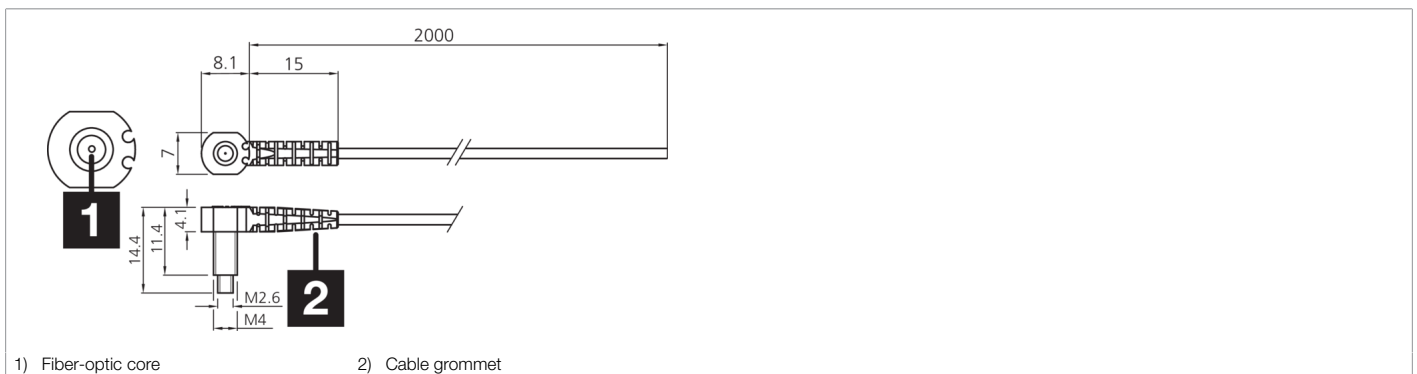

Function												
												

Technical data (typ.)	+20°C
Length	2,000 mm (Can be shortened)
Thread	M4
Light aperture	radial
Bending radius	> 15 mm
Fiber	Coaxial, Ø 0.25 mm (1x), Ø 0.25 mm (10x)
Material	<ul style="list-style-type: none"> <li>■ Stainless steel (Sensor probe)</li> <li>■ PE (Coating)</li> </ul>
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	90 mm
Resolution	Ø 0.05 mm
Temperature resistance	-55 ... +70 °C
<b>More information / accessories</b>	<a href="https://www.di-soric.com/209955">https://www.di-soric.com/209955</a>