





- Polarization filter
- High-temperature resistant
- To reduce glare or reflections
- Quick and easy mounting
- Scratch-resistant safety screen
- Mounting materials included in scope of delivery



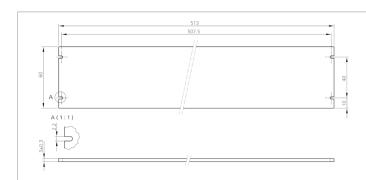

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------|--|
| Assembly | Using fixing screws |
| Housing dimensions | 60 x 513 x 3 mm |
| Housing length | 513 mm |
| Housing height | 3 mm |
| Housing width | 60 mm |
| Material | PMMA, hardcoated (Window) |
| Component | Polarization filter |
| To be used for | Barlights BE-A500, Barlights BEK-A500 |
| Note | With a pulse / pause ratio of the light colors white / blue over 75%, full guarantee only with external cooling. |
| More information / accessories | https://www.di-soric.com/210003 |

di-soric GmbH & Co. KG $\,$. Steinbeisstraße 6 $\,$. DE-73660 Urbach $\,$. www.di-soric.com