



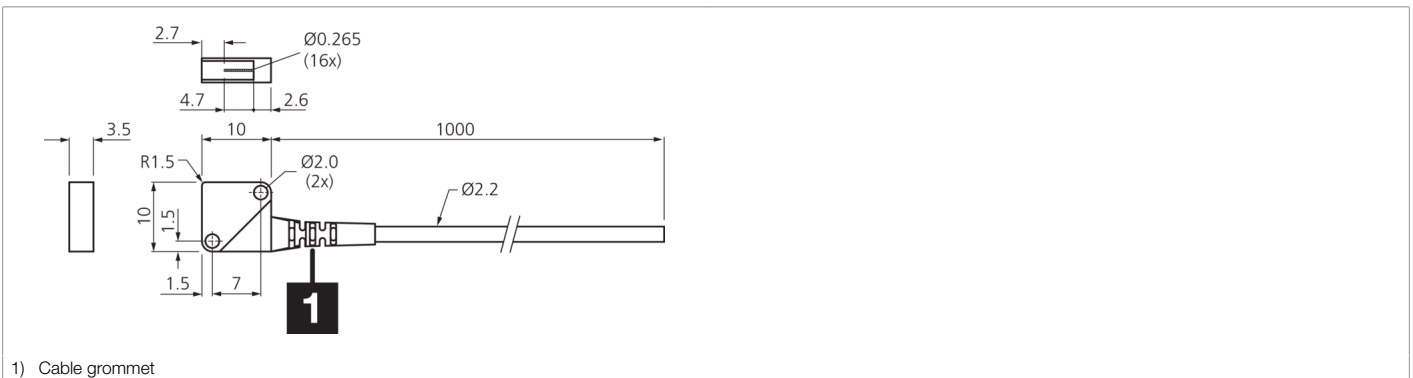

210064
KLEMR-Q10-T1-4
Plastic fiber optics

- 90° deflection
- Area detection without gaps
- Large range
- Accurate detection

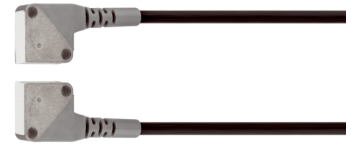

Function												

Technical data (typ.)	+20°C
Length	1,000 mm (cannot be shortened)
Housing dimensions	10 x 10 x 3.5 mm
Light aperture	radial
Bending radius	> 25 mm
Fiber	Ø 0.265 mm (16x)
Cross-section converter	4.24 mm
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Through-beam sensor
Design	Cuboid design
Characteristics	With cable protection bushing
To be used for	Device series OLV-K Amplifier
Range	200 mm
Resolution	Ø 0.1 mm
Temperature resistance	-55 ... +70 °C

More information / accessories <https://www.di-soric.com/210064>