





**210188
VP 700
Multi-functional control panel**

- For individual visualization and manipulation of one or more vision inspections
- 7" WVGS, 800x480 pixels, 350cd/m²
- Capacitive Multi Touch
- For all Vision Sensors of type CS
- Fanless operation

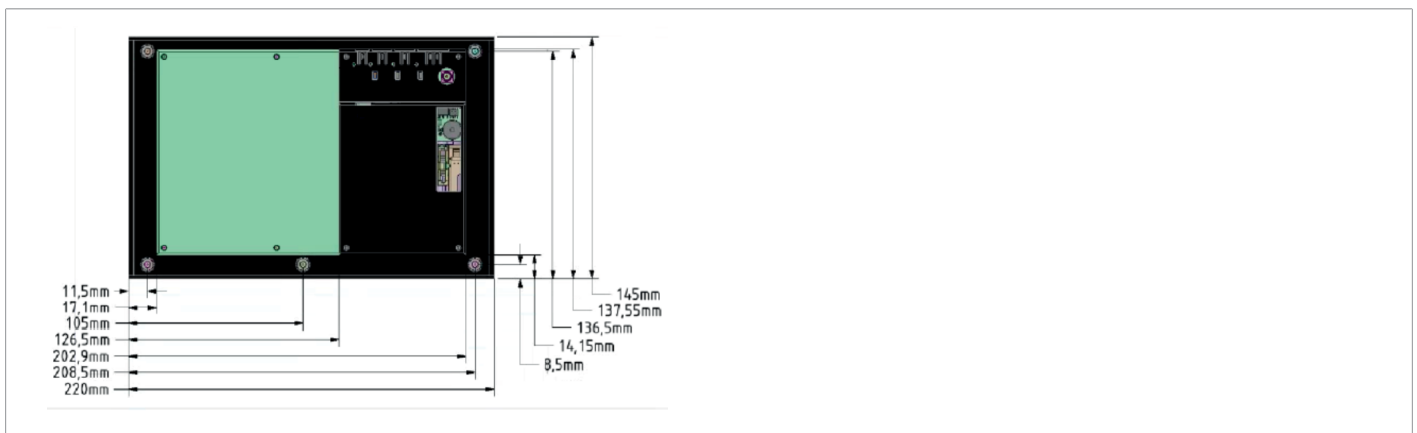

Function														
													CE	

Technical data (typ.)	
Service voltage	9 ... 30 V DC
Mounting	Threaded bolt M4 (6x)
Housing dimensions	145 x 220 x 50 mm
Display diagonal	7 Zoll
Component	Multi-functional control panel
Operating principle	Touchscreen monitor
To be used for	CS 50 Vision Sensors
Functions	Communication with camera (CloudLink/Telnet-based), Changing camera job via touchscreen, Manipulation of camera settings via touchscreen, Manipulation of a job via all linked variables/no
Languages	German, English, French
Interface	<ul style="list-style-type: none"> ■ telnet ■ ReST-API ■ http
Data communication to camera	All variables linked in AutoVision can be displayed / manipulated
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 65 (Front side)
Connection	RJ 45 (Network)
Connection 2	Connector, 2-pin (Voltage supply)

More information / accessories	https://www.di-soric.com/210188
--------------------------------	---