



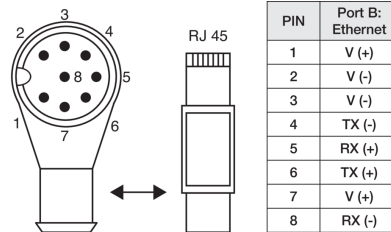

210277
VKHM-W-5/RJ45-CS
Ethernet cable

- For Ethernet connection
- Drag chain compatible
- High protection type
- Oil-resistant
- For CS Vision Sensors

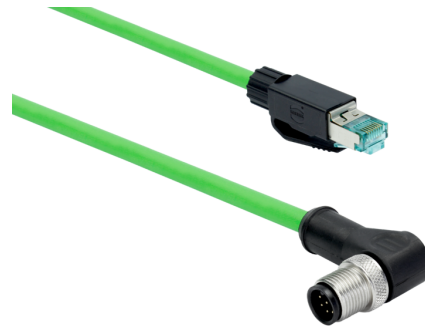

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	< 30 V AC/DC
Length	5,000 mm
Diameter	Ø 6.8 mm (Diameter)
Thread	M12 x 1
Material	<ul style="list-style-type: none"> ■ Polyurethane, interior PVC (Cable) ■ Polyurethane (Connector)
Drag chain properties	<ul style="list-style-type: none"> ■ > 10 Mio. (Bending cycles) ■ 7.5 x Ø (Min. bending radius) ■ 3 m/s (Max. moving speed) ■ 5 m/s² (Max. acceleration) ■ ± 30 °/m (Max. torsion)
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Straight / angled
To be used for	CS 50 Vision Sensors
Drag chain compatible	Yes
Ambient temperature during operation	-40 ... +80 °C
Protection type	IP 67
Connection	Socket, M12, 8-pin
Connection 2	Connector, RJ 45

More information / accessories

<https://www.di-soric.com/210277>